

04/21/00
jc777 U.S. PTO

04-24-00

PATENT

Attorney Docket No. PACACC.001CP1

Date: April 20, 2000

Page 1

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor: **Brett D. Riggs**

For: **REMOTE CONTROL INTERFACE FOR REPLACEMENT VEHICLE STEREOS**

Enclosed are:

- (X) Eleven (11) sheets of drawings.
- (X) Recordation form cover sheet with 1-page assignment.
- (X) A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- (X) A power of attorney form and copy of assignment.
- (X) Initial signed declaration by inventor.
- (X) Return prepaid postcard.

jc678 U.S. PTO
09/552981
04/21/00

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$345	\$345
Total Claims	23 - 20 =	0 ×	\$9	\$0
Independent Claims	3 - 3 =	0 ×	\$39	\$0
If application contains any multiple dependent claims(s), then add			\$130	\$n/a
TOTAL FILING FEE		\$345		

- (X) A check in the amount of \$345.00 to cover the filing fee is enclosed.
- (X) A check in the amount of \$40.00 to cover the assignment recording fee.
- (X) The Commissioner is hereby authorized to charge any additional fees which may be required, now or in the future, or credit any overpayment to Account No. 11-1410. A duplicate copy of this sheet is enclosed.

Recordation Cover Sheet
Hester McInnis


PATENT

Attorney Docket No. PACACC.001CP1

Date: April 20, 2000

Page 2

(X) Please use Customer No. 20,995 for the correspondence address.



Michael H. Trenholm
Registration No. 37,743
Attorney of Record

R:\DOCS\MHT\MHT-3774.DOC:lw
042000

042000 11:23:00 AM 4/20/2000

KNOBBE, MARTENS, OLSON & BEARA LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS**PATENT, TRADEMARK AND COPYRIGHT CAUSES**

3801 UNIVERSITY AVENUE

SUITE 710

RIVERSIDE, CALIFORNIA 92501-3229

(909) 781-9231

FAX (909) 781-4507

INTERNET WWW.KMOB.COM

LOUIS J. KNOBBE*
DON W. MARTENS*
GORDON H. OLSON*
JAMES B. BEAR
DARRELL L. OLSON*
WILLIAM B. BUNKER
WILLIAM H. NIEMAN
ARTHUR S. ROSE
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR.
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL
ANDREW H. SIMPSON
JEFFREY L. VAN HOOSEAR
DANIEL E. ALTMAN
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMES†
STEVEN J. NATAUPSKY
PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER

BRENTON R. BABCOCK
THOMAS F. SMEGAL, JR.
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
RONALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKE
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
GINGER R. DREGER
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART, PH.D.
DOUGLAS G. MUEHLHAUSER
LORI LEE YAMATO
MICHAEL K. FRIEDLAND
STEPHEN M. LOBBIN
STACEY R. HALPERN
DALE C. HUNT, PH.D.
LEE W. HENDERSON, PH.D.
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL
MARK M. ABUMERI
JON W. GURKA
ERIC M. NELSON
MARK R. BENEDICT, PH.D.
PAUL N. CONOVER
ROBERT J. ROBY
SABING H. LEE
KAROLINE A. DELANEY

JOHN W. HOLCOMB
JAMES J. MULLEN, III, PH.D.
JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH.D.
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH.D.
TIRZAH ABE LOWE
GEOFFREY Y. IIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
JAMES W. HILL, M.D.
ROSE M. THIESSEN, PH.D.
MICHAEL L. FULLER
MICHAEL A. GULIANA
MARK J. KERTZ
RABINDER N. NARULA
BRUCE S. ITCHKAWITZ, PH.D.
PETER M. MIDGLEY
THOMAS S. MCCLENAHAN
MICHAEL S. OKAMOTO
JOHN W. GROVER
MALLARY K. DE MERLIER
IRFAN A. LATEEF
AMY C. CHRISTENSEN
SHARON S. NG
MARK J. GALLAGHER, PH.D.
DAVID G. JANKOWSKI, PH.D.
BRIAN C. HORNE
PAYSON J. LEWILLEUR
WILLIAM G. BERRY

OF COUNSEL
JERRY R. SEILERJAPANESE PATENT ATTY
KATSUHIRO ARAI**EUROPEAN PATENT ATTY
MARTIN HELLEBRANDTKOREAN PATENT ATTY
MINCHEOL KIMSCIENTISTS & ENGINEERS
(NON-LAWYERS)

RAIMOND J. SALENIEKS**
NEIL S. BARTFELD, PH.D.**
DANIEL E. JOHNSON, PH.D.**
JEFFERY KOEPKE, PH.D.**
KHURRAM RAHMAN, PH.D.
JENNIFER A. HAYNES, PH.D.
BRENDAN P. O'NEILL, PH.D.
THOMAS Y. NAGATA
ALAN C. GORDON
LINDA H. LIU
YASHWANT VAISHNAV, PH.D.
MEGUMI TANAKA
ANDREW N. MERICKEL
CHE S. CHERESKIN, PH.D.**
JASON I. SAATHOFF
ERIK W. ARCHBOLD
PHILIP C. HARTSTEIN
JULIE A. HOPPER
CHRIS S. CASTLE

* A PROFESSIONAL CORPORATION

† ALSO BARRISTER AT LAW (U.K.)

** U.S. PATENT AGENT


Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"**Attorney Docket No. :** PACACC.001CP1**Applicant :** Brett D. Riggs**For :** REMOTE CONTROL INTERFACE FOR
REPLACEMENT VEHICLE STEREOS**Attorney :** Michael H. Trenholm**"Express Mail"****Mailing Label No. :** EL 490 105 918 US**Date of Deposit :** April 21, 2000

I hereby certify that the accompanying

Transmittal in Duplicate; Specification in 29 pages; 11 sheets of drawings;
SIGNED Declaration by Inventor in 2 pages; Recordation Form Cover Sheet and
Assignment in 2 pages; Power of Attorney by Assignee in 3 pages; Small Entity
Statement; Checks for Filing Fees; Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.

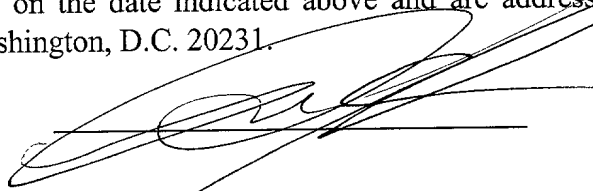

R:\DOCS\MHT\MHT-3777.DOC:lw

042000

201 CALIFORNIA STREET
SUITE 1150
SAN FRANCISCO, CALIFORNIA 94111
(415) 954-4114
FAX (415) 954-4111

501 WEST BROADWAY
SUITE 1400
SAN DIEGO, CALIFORNIA 92101
(619) 235-8550
FAX (619) 235-0176

620 NEWPORT CENTER DRIVE
SIXTEENTH FLOOR
NEWPORT BEACH, CALIFORNIA 92660
(949) 760-0404
FAX (949) 760-9502

1875 CENTURY PARK EAST
SUITE 600
LOS ANGELES, CALIFORNIA 90067
(310) 407-5484
FAX (310) 407-5485

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL-ENTITY STATUS

I, the undersigned, do hereby declare that:

☒ I am an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: P.B. Clarke & Assoc.

ADDRESS OF CONCERN: 1502 S. Santa Fe Street, Santa Ana, CA 92705

I further declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both. I further declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in the patent or application identified above.

The individual, concern or organization identified above has not assigned, granted, conveyed or licensed, and is under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

If the rights held by the above-identified individual, concern or organization are not exclusive, each individual, concern or organization having rights in the invention are identified below. Each such individual, concern or organization must file separate verified statements averring to their status as small entities.

***NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).**

FULL NAME: P.B. Clarke & Assoc.

ADDRESS: 1502 S. Santa Fe Street, Santa Ana, CA 92705

☐ INDIVIDUAL ☒ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small-entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of

Application or Patent No.: Unknown

Filed or Issued: Herewith

For: **REMOTE CONTROL INTERFACE FOR REPLACEMENT VEHICLE STEREOS**

Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Bob Clarke

TITLE OF PERSON (if not an owner or individual): President

ADDRESS OF PERSON SIGNING: 1502 S. Santa Fe Street, Santa Ana, CA 92705

SIGNATURE:

Back

DATE:

10 APRIL, 00

R:\DOCS\MHT\MHT-3558.DOC:lw
033000

Parameter	Value	Unit	Source
α	0.000000	deg	ICRS
δ	0.000000	deg	ICRS
λ	0.000000	deg	ICRS
b	0.000000	deg	ICRS
ℓ	0.000000	deg	ICRS
ϕ	0.000000	deg	ICRS
ψ	0.000000	deg	ICRS
χ	0.000000	deg	ICRS
η	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	ICRS
φ	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	ICRS
φ	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	ICRS
φ	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	ICRS
φ	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	ICRS
φ	0.000000	deg	ICRS
θ	0.000000	deg	ICRS
ζ	0.000000	deg	ICRS
ξ	0.000000	deg	ICRS
γ	0.000000	deg	ICRS
β	0.000000	deg	ICRS
μ	0.000000	deg	ICRS
ν	0.000000	deg	ICRS
τ	0.000000	deg	ICRS
σ	0.000000	deg	ICRS
ρ	0.000000	deg	ICRS
ω	0.000000	deg	ICRS
ϖ	0.000000	deg	

REMOTE CONTROL INTERFACE FOR REPLACEMENT VEHICLE STEREOS

Related Applications

5 This is a continuation in part of U.S. patent application Serial No. 09/442,627
filed November 17, 1999.

Background of the Invention

Field of the Invention

10 The present invention relates to motor vehicle accessories and, in particular,
concerns a device adapted to permit the use of after-market replacement stereos with
factory installed remote stereo controls, such as steering wheel stereo controls and/or
voice commands.

Description of the Related Art

15 Vehicles, such as automobiles, boats, and motorcycles, are often equipped with
a stereo system at the factory. Over time, vehicles have been equipped with
increasingly more sophisticated stereo systems that provide better sound performance
and more features. These stereo systems are quite complex and are capable of playing
cassette tapes and CDs and also provide radio reception.

20 Typically, the control units or receivers for these stereos are positioned adjacent
the driver's seat of the vehicle such that the driver can manipulate the stereo controls
while driving. While the stereo controls are typically positioned somewhat adjacent the
driver, the stereo controls are generally not within the driver's field of view and also
may require the driver to remove their hand from the steering wheel or handlebars of
the vehicle in order to manipulate the stereo controls. This can create a potentially
25 dangerous situation as the driver is now no longer grasping the driving controls with
both hands and the driver's attention has been diverted from the path of travel of the
vehicle to the stereo controls. Numerous accidents occur as a result of the driver
directing their attention away from safely operating the vehicle.

30 Moreover, the typical location for stereo controls is relatively inaccessible to
some of the passengers. For example, if the stereo controls are located adjacent the
driver in the front seat of a passenger automobile, the passengers in the back seat may
not be able to access the controls to change the operation of the stereo.

To address these particular needs, vehicle manufacturers have begun to offer vehicles that have local stereo control buttons that are not positioned adjacent the stereo receiver but are positioned in more favorable locations for driver or passenger manipulation of the stereo controls. For example, many current production automobiles incorporate local stereo controls mounted on the steering wheel of the vehicle. These local stereo controls typically comprise push-button switches that allow the user to control the operation of the stereo, *e.g.*, increase or decrease volume, change channels or change play format, by manipulating switches on the steering wheel. These types of local stereo controls reduce the likelihood that the driver's attention will be drawn away from the path of travel of the vehicle or from the operation of the vehicle while adjusting the stereo.

Similarly, many passenger vehicles also incorporate local stereo controls that are located remotely from the stereo receiver in locations where passengers can control the operation of the stereo by manipulating the remote stereo control buttons. For example, some larger vehicles incorporate stereo control buttons positioned adjacent the backseat passenger location such that passengers can control the operation of the stereo unit that is mounted adjacent the driver in the front seat.

While these local stereo controls improve the flexibility of controlling the stereo unit, these local stereo controls are generally rendered inoperable when the originally installed stereo receiver is replaced with a replacement stereo receiver. Oftentimes, the owners of vehicles become dissatisfied with the originally installed stereo and want to replace the originally installed stereo with a different after-market stereo unit. Typically, replacement stereo units are of higher quality and offer greater performance characteristics than the originally installed stereo unit. In addition, after-market stereos are typically less expensive than comparable factory stereos and offer a more economical replacement in case the original unit is stolen or damaged.

However, installing these after-market stereo units typically renders the local stereo control buttons inoperable as these local stereo control buttons or switches are connected to the original stereo control unit or receiver via a hardwired assembly that is specifically designed to connect these local control buttons to the stereo control unit. The typical replacement stereo receiver is not typically configured to be able to readily connect or function with the hardwired local stereo controls.

One possible solution to this problem is to provide a handheld wireless remote control unit along with the replacement stereo receiver wherein the replacement stereo receiver is adapted to receive wireless signals from the handheld remote control unit. The person holding the handheld remote control unit can then control the operation of the replacement stereo unit without touching the controls on the front face of the stereo receiver. While a handheld remote control unit allows for people positioned remotely from the stereo receiver to control the operation of the replacement stereo, the handheld remote control devices are generally unsatisfactory for many vehicle drivers and passengers.

In particular, the handheld remote control device is easily misplaced or lost or is not readily accessible to the driver or the passenger while the vehicle is in operation. Moreover, the handheld remote control device often requires the driver or the passenger to specifically point the device in the direction of the replacement stereo receiver so that the receiver can receive the appropriate wireless signal to change the operation of the stereo. If the driver of the vehicle is using the remote control, the driver may have to take their attention away from the path of travel of the vehicle and the operation of the vehicle, locate the appropriate buttons on the handheld remote control, and then point the handheld remote control in the direction of the stereo control receiver. Hence, while these handheld remote control units allow for remote control of a replacement stereo, they still do not provide the convenience of the local controls positioned in the vehicle that are adapted to be used in conjunction with the original stereo system.

Recent advances in voice recognition technology and vehicle quieting have made it possible to implement voice activated controls in motor vehicles. The 2000 S Type Jaguar offers such a system as a factory option. A voice recognition system is able to recognize the sound pattern of a spoken word or phrase and enact a corresponding action such as turning on high beams, locking a door, increasing the volume of a stereo, etc. However, as a factory installed feature, typical voice command systems suffer the same limitations as local stereo controls; they work well with the factory-supplied features, but typically will not readily function with after-market equipment. Some replacement stereos are available with included voice recognition features, however, these stereos tend to be quite expensive and the voice recognition only works with that particular stereo.

From the foregoing, it will be appreciated that there is a need for a system that will allow existing local stereo controls to be used to control a replacement stereo system. To this end, there is a need for a system that will receive signals from local stereo control switches mounted within the vehicle designed to control the originally installed stereo and then provide appropriate signals to a subsequently installed stereo receiver. Furthermore, there is also a continuing need for a method to economically retrofit a voice recognition system to effectively control a variety of after market stereo systems and the like.

Summary of the Invention

The aforementioned needs are satisfied by the stereo control interface device of the present invention. In one aspect, the device is adapted to receive signals from local stereo controls located at positions within a vehicle that are remote from the stereo control unit or receiver and then translate the signals from the existing local stereo controls and produce output signals in a format which will change the function of the replacement stereo in the same manner that manipulation of the local controls would change the original stereo.

In one particular embodiment, the local stereo controls comprise one or more switches or buttons located remotely from the stereo control unit which a user, such as a driver, can manipulate to control the operation of the stereo control unit. In this aspect, the local stereo control switches provide a signal to the interface device via hardwiring and the interface is adapted to receive the signal and then produce a corresponding wireless signal that is transmitted to a wireless receiver on the after-market replacement stereo control unit such that manipulation of the local stereo controls results in a corresponding control signal being sent to the after-market replacement stereo.

In another aspect of the invention, the interface device is adapted to be programmable. The user can install the interface device and then program the interface to produce output signals that, when received by the replacement stereo control unit, will result in the stereo control performing an operation that corresponds to the operation activated by the local control positioned within the vehicle.

In another aspect of the invention, an interface device is provided that is adapted to receive command signals from remote locations and then provide corresponding

signals to a stereo receiver so as to change the function and operation of the stereo receiver. In one particular aspect, the interface device recognizes audio commands and then produces corresponding signals that are recognizable by the stereo receiver. In one particular embodiment, the interface device is adapted to be used with replacement, after market stereo receivers that are adapted to receive wireless signals so as to permit remote control of the stereo receiver. The interface device is adapted to transmit wireless signals, such as IR signals, to the stereo receiver so as to control the function of the stereo receiver. In one embodiment, the interface device is designed to be programmable such that the interface can be taught to recognize particular spoken commands and send corresponding wireless signals to the aftermarket stereo receiver.

It will be appreciated that the interface device is designed to permit remote operation of the stereo receiver either through the use of existing remote controls or through the use of voice commands. The interface device is designed to permit the use of remote signals with aftermarket stereo receivers which permits replacement of originally installed stereo control units.

It will be appreciated that the interface of the present invention allows for local stereo control devices, such as steering wheel switches or buttons, handlebar switches, or passenger switches, to continue to be used with replacement after-market stereo control units that are replacing the original installed stereo control unit. The flexibility of using this device, in at least one aspect, is enhanced due to the interface being programmable by the installer. The additional ability to recognize voice commands and use them to control the features of a replacement stereo offers an additional convenience to the user. These and other objects and advantages of the present invention will become more fully apparent from the following description taken in conjunction with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is an isometric view of a typical vehicle dashboard incorporating local stereo control buttons located on a steering wheel of the dashboard and located adjacent the backseat and further including an interface device and a replacement stereo control unit or receiver;

Figures 2A and 2B are top isometric illustrations of a motorcycle incorporating local stereo controls mounted on the handlebars of the motorcycle and an interface device that allows for the communication of signals from the local stereo controls to a replacement stereo receiver;

5 Figure 3 is a schematic block diagram illustrating the basic configuration of the remote stereo control interface device of Figures 1 and 2;

Figure 4A is a schematic electrical diagram of the circuitry of one embodiment of the remote stereo control interface device;

10 Figures 4B and 4C are partial schematic illustrations illustrating alternative configurations of local stereo controls;

Figure 5A is an exemplary flow chart illustrating the operation of a microcontroller of the remote stereo control interface device in a program mode;

Figure 5B is an exemplary flow chart illustrating the operation of the microcontroller of the remote stereo control interface device in a run mode;

15 Figure 6 is a block diagram showing the configuration of a voice control interface to enable voice commands to control a stereo or other parts of a motor vehicle;

Figure 7 is a flow chart depicting the operation of the voice control interface in the program mode of operation; and

20 Figure 8 is a flow chart depicting the operation of the voice control interface in the run mode of operation.

Detailed Description of the Preferred Embodiment

Reference will now be made to the drawings wherein like numerals refer to like parts throughout. Figure 1 illustrates a perspective view of an exemplary vehicle interior incorporating the components of a remote stereo control interface system 100. The remote stereo control interface system 100 is comprised of factory installed local stereo controls 106 generally located in the center hub of a typical vehicle steering wheel 102. The local stereo controls 106 are used for the driver to make selections to a replacement after-market in-dash stereo 104, wherein these selections may include AM/FM, seek, volume up, volume down, play, etc.

The advantage of making these desired selections with the local stereo controls 106 is to reduce the occurrence of the driver moving his or her eyes away from the road

or hands away from the steering wheel 102 when making selections at the in-dash stereo 104. Hence, the local stereo controls 106 are installed in the factory to give the driver greater convenience in controlling the operation of the factory installed stereo while driving. These local stereo controls 106 are typically hardwired to the factory installed stereo receiver such that replacement of the factory installed stereo receiver typically disables the local stereo controls 106. However, as will be described in greater detail below, a remote interface circuit 110 is adapted to be connected to the existing local stereo controls 106 and communicate with a replacement in-dash stereo 104 that replaces the original stereo receiver such that the existing local stereo controls 106 can be used to control the operation of the replacement in-dash stereo 104.

In particular, the local stereo controls 106 are hardwired to the remote interface circuit 110 which is illustrated in phantom lines and is described in greater detail in reference to Figures 4A, 4B and 4C below. The remote interface circuit 110, in this embodiment, is positioned within a casing 111 that is rectangular in shape, approximately 4.0 inches long, 2.0 inches wide and 2.0 inches in height. As is illustrated in Figure 1, the casing 111 is adapted to be mounted unobtrusively behind the dashboard 103 of the vehicle so as to be generally hidden from view. The remote interface circuit 110 is adapted to be connected to the local stereo controls 106 via the existing hardwiring of the vehicle and is also adapted to send signals to the replacement in-dash stereo 104 via a transmission cable 112. In this embodiment, the transmission cable 112 includes an output signal transmitter 154 (See, Figure 3) that is located in line of sight of a remote signal receiver (not shown) on the after-market in-dash stereo 104. The transmission cable 112 is illustrated with phantom lines and is generally 4 feet in length and is located in the vehicle dashboard 103 such that the tip of the transmission cable 112 that is comprised of the output signal transmitter 154 is positioned generally within close proximity of the in-dash stereo 104.

Generally, the replacement in-dash stereo 104 is used in place of an original stereo receiver, such as the factory installed stereo receiver, that has been stolen or has become defective or out-of-date. It is fairly common that the replacement in-dash stereo 104 is lower in price and/or includes additional features over the original receiver. The replacement in-dash stereo 104 can be any of a number of after-market receivers, such as those manufactured by Panasonic, Clarion, Denon, Eclipse, JVC,

Kenwood, Pioneer, Sony, etc. The typical after-market in-dash stereo 104 is equipped with a wireless receiver, such as an infrared (IR) receiver, that is adapted to receive wireless signals from a handheld remote control 160. This enables the driver to use a handheld remote control 160 to adjust the stereo's operation, e.g., change channels, volume, etc. As will be described in greater detail below, the remote interface circuit 110 is adapted to be programmed to produce wireless signals similar to those produced by the handheld remote control 160 that are recognizable by the after-market in-dash stereo 104 upon receipt of the corresponding signals from the local stereo controls 106.

The remote interface circuit 110 can also be adapted to connect with one or more alternative local stereo controls 114, illustrated in Figure 1, wherein the alternative local controls 114 are positioned, in this embodiment, adjacent the rear seating area of the vehicle. The alternative local stereo controls 114 are shown in an exemplary location and it can be appreciated that the alternative local stereo controls 114 may be positioned almost anywhere in the vehicle suitable for remote function selection. These types of alternative local stereo controls 114 are typically positioned so that people sitting remotely from the in-dash stereo 104 can still control the basic functions of the in-dash stereo 104 such as changing the program, the channel, the volume, etc.

The remote interface circuit 110 is connected to the existing hardwiring of the alternative local stereo controls 114 and is then programmed to provide appropriate signals to the replacement in-dash stereo 104 so as to be able to provide commands to the replacement in-dash stereo 104 corresponding to the commands of the selected alternative local controls 114. Hence, the remote interface circuit 110 can be used to receive signals from alternative local stereo controls 114 located anywhere within a vehicle such that the alternative local stereo controls 114 can be used to control a replacement in-dash stereo 104.

Figures 2A and 2B illustrate another embodiment of a remote stereo control interface system 101, substantially similar to the remote stereo control interface system 100 that is shown in Figure 1. In particular, Figure 2A illustrates a top view of a typical motorcycle 116 with handlebars 120 for steering. It is commonly known that expensive stereo systems are used on many high-end motorcycles 116. Oftentimes, the motorcycle 116 is equipped with handlebar stereo controls 130 positioned on the handlebars 120 so that the rider does not have to remove his or her hands from the

handlebars 120 of the motorcycle 116 while changing radio channels, adjusting volume, adjusting play selection, and the like. However, these handlebar stereo controls 130 are also typically hardwired to the existing factory installed stereo receiver such that replacement of the factory installed stereo receiver often results in the handlebar stereo controls 130 being rendered inoperative.

The remote stereo control interface system 101 can be adapted to utilize the factory mounted handlebar stereo controls 130 with a replacement stereo receiver 124 by receiving the signals from the handlebar stereo controls 130 and transmitting a corresponding signal that is recognizable by the replacement stereo receiver 124 mounted on the motorcycle 116. In particular, the remote stereo control interface system 101 also includes the remote interface circuit 110 that is positioned within the casing 111 (shown in phantom) that is hardwired to the existing handlebar stereo controls 130. The remote interface circuit 110 includes the transmission cable 112 that is positioned so that the output signal transmitter 154 is positioned generally within close proximity of the replacement stereo receiver 124. As discussed above, the replacement stereo receiver 124 is preferably equipped to receive wireless signals, such as IR signals, from the output signal transmitter 154 to change or adjust the replacement stereo receiver 124 operation.

Figure 3 is a block diagram of the remote stereo control interface system 100 or 101 of the preferred embodiment. The remote stereo control interface system 100 or 101 incorporates a microcontroller 142 that is adapted to receive electrical signals from various switches, sensors and controls located in the vehicle for the purpose of controlling the replacement in-dash stereo 104. In particular the microcontroller 142 is adapted to receive a plurality of electrical signals from stereo controls, such as either the local stereo controls 106 or the alternative local stereo controls 114 of Figure 1, or the handlebar stereo controls 130 of Figures 2A and 2B. The microcontroller 142 is also adapted to receive a signal from a detector stage 152 from the handheld remote control 160. As is well understood in the art, the detector stage 152 is adapted to receive and demodulate a wireless signal sent by a handheld remote control 160 for the in-dash stereo 104. As discussed above, the in-dash stereo 104 is preferably adapted to receive IR signals from a handheld remote control 160. As will be described in greater detail below, the microcontroller 142 is preferably adapted to be able to receive, from the

handheld remote control 160, the wireless signal for controlling a particular stereo function, store this signal and then reproduce and broadcast this signal to the after-market in-dash stereo 104 when a driver or passenger in the vehicle activates a stereo control 106, 114 or 130 corresponding to the function of the stored signal.

5 The microcontroller 142, in this embodiment, also receives a signal from a program mode select switch 150 that is attached to the casing 111 of the remote interface circuit 110. The program mode select switch 150 when selected, instructs the microcontroller 142 to enter a program mode, allowing the microcontroller 142 to learn and record the specific control functions selected on the stereo controls 106, 114, 130
10 and the handheld remote control 160. These signals are stored in non-volatile memory 144 located on-board the remote interface circuit 110. It will be appreciated that the pre-selected specific control functions selected on the stereo controls 106, 114, 130 and the handheld remote control 160 will not be lost upon the removal of vehicle power when the ignition is switched off to the remote interface circuit 110 and the
15 microcontroller 142. The microcontroller 142, when not in a program mode, may be in a run mode or an off state. A flowchart of the program mode and run mode shall be discussed in reference to Figures 5A and 5B below.

 The microcontroller 142 is also adapted to output electrical signals to various output and display devices. In particular, the microcontroller 142 communicates data
20 and instructions to the stereo receiver 104 via an output signal transmitter 154 located at the tip of the transmission cable 112. During the run mode of operation, the output signal transmitter 154 in combination with the microcontroller 142 generates a carrier signal with modulated data and instruction information, wherein this information is transmitted to the after-market stereo receiver 104 for the purpose of wireless stereo
25 function selection and modification.

 Other output devices attached to the microcontroller 142 include a local stereo control indicator 156 and a handheld remote learn indicator 162. The local stereo control indicator 156, in this embodiment, is a light emitting diode (LED) and provides the programmer a visual indication of the status of the programmability of each stereo
30 control 106, 114, 130 function in the manner that will be described in greater detail hereinbelow. Furthermore, the handheld remote learn indicator 162 is controlled by the microcontroller 142 and provides the programmer a visual indication of the status of the

programmability of each corresponding handheld remote instruction transmitted by the handheld remote control 160. The function of the indicators 156, 162 will be described in greater detail in reference to Figures 5A and 5B hereinbelow.

Figure 4A is a schematic circuit diagram of the remote interface circuit 110, wherein the remote interface circuit 110 is comprised of the microcontroller 142, the non-volatile memory 144, a plurality of inputs to the microcontroller 142 and outputs from the microcontroller 142. In particular, in this embodiment, the local stereo controls 106 form a voltage divider network that connects to the vehicle ignition voltage source. As a local stereo control 106 is selected, the corresponding resistive network is 'placed' in the circuit and the voltage drop across this resistive element is applied to an analog-to-digital input port of the microcontroller 142. The resistive network of the local stereo controls 106 is comprised of a plurality of resistors (R_v , R_w , R_x , R_y , etc.) in a series configuration along with a plurality of corresponding switches (Sw_1 , Sw_2 , Sw_3 , Sw_4 , etc.). One side of each of the switches (Sw_1 , Sw_2 , Sw_3 , Sw_4 , etc.) is connected together and in a series configuration with resistor R_j which is located on-board the remote interface circuit 110.

In operation, the local stereo controls 106 operate as follows. When the user manipulates one of the local stereo controls 106 thereby activating one of the switches Sw_1 - Sw_4 , etc., the vehicle ignition voltage source is dropped by the corresponding resistor R_v - R_z , etc. so that a particular voltage signal is produced. This particular voltage signal can then be provided to the original stereo which is programmed to recognize the particular voltage signal as corresponding to a signal to implement a particular stereo function. For example, depressing switch Sw_1 may instruct the factory stereo to increase the volume by a particular amount or it may instruct the stereo to change the radio channel to a different preset station.

In the implementation shown in Figure 4A, the voltage signal from the local stereo controls 106 is provided to the microcontroller 142. As will be described in greater detail below, the microcontroller 142 is preferably configured to receive a particular voltage signal and then produce a corresponding wireless signal that will result in the replacement in-dash stereo 104 changing function in the same manner that the factory installed stereo would change function in response to receiving the same voltage signal. In particular, in one embodiment, the remote interface circuit 110 is

designed to produce IR signals that correspond to the signals received from the stereo controls 106, 114 or 130.

As illustrated in Figure 4A, in this implementation, a plurality of different voltage signals are sent to the microcontroller 142 in response to the user activating the plurality of different switches Sw1 - Sw4. The voltage from the switches Sw1 - Sw4 is preferably provided to an analog-to-digital converter (A-to-D). In one embodiment, the microcontroller 142 is programmable and the converted digital signal from the switches Sw1 - Sw4 can be stored in the non-volatile memory 144 such that when the microcontroller 142 receives this signal, the stored digital signal can be referenced to produce a corresponding wireless signal in the manner that will be described in greater detail below.

In the illustrated embodiment, a GM-Chrysler selector switch 151 is also located on-board the remote interface circuit 110. In particular, the remote interface circuit 110 incorporates the GM-Chrysler selector switch 151 such that when placed in the GM position allows for a voltage drop produced across R2 to be fed to another A-to-D input port of the microcontroller 142. As with the voltage divider networks configured within the local stereo controls 106, the series combination of resistor R1 and R2 also form a voltage divider network with a tap formed at the node of R1 and R2 and the vehicle ignition again serving as a voltage excitation source. The sampled voltage by the microcontroller 142 at this R1 and R2 node forms a reference voltage level against which the same ignition voltage excites the network formed by the local stereo controls 106 and produces selected output voltages. A software algorithm that runs in the microcontroller 142 measures these voltages and provides compensation for voltage fluctuations that occur on the vehicle ignition when the vehicle is a General Motors product. Moreover, when the GM-Chrysler selector switch 151 is placed in the Chrysler position, the reference voltage now becomes VDD (+5VDC) shown in Figure 4A at output pin 3 of voltage regulator U3. Chrysler vehicles currently use a regulated +5 VDC supply that does not change with ignition voltage conditions.

Hence, in this embodiment, the remote interface circuit 110 is configurable so as to be adapted for more than one different make or model of vehicle. It will be appreciated that the electrical systems of different makes and models of vehicles vary from vehicle to vehicle. In this particular embodiment, the remote interface circuit 110

can be made as universal as possible such that a single device can be configured to be used with many different types of vehicles.

As is also illustrated in Figure 4A, the microcontroller also receives an input signal from the IR detector stage 152, wherein the detector stage 152 is formed by the transistor Q2. The transistor Q2 is an IR detector device adapted to accept modulated commands and data from the handheld remote control 160 that is provided with the after-market replacement stereo receiver 104. As discussed above, the after-market stereo receiver 104 is preferably adapted to receive wireless signals from the handheld remote control 160 to control stereo function. In this embodiment, the remote interface circuit 110 is adapted to be able to receive and store the wireless signals from the handheld remote control 160 so that the remote interface circuit 110 can be programmed to reproduce a wireless signal corresponding to the signal produced by a local stereo control 106.

In this embodiment, the remote interface circuit 110 receives a modulated carrier signal from the handheld remote control 160 that is then provided to the microcontroller 142. In particular, the modulated carrier signal is provided by the detector stage 152 to a bi-directional input-output port of the microcontroller 142. Subsequently, the data pattern received by the microcontroller 142 from the detector stage 152 is stored in the non-volatile memory 144 via a serial data transfer link from the microcontroller 142 that has two pull-up resistors R10 and R11. As will be described in greater detail below, this stored data pattern can be retrieved at a later time for use in the run mode such that the remote interface circuit 110 can reproduce the wireless signal produced by the handheld remote control 160 to change a stereo function in response to receiving a corresponding command from the local stereo controls 106.

In this embodiment, the microcontroller 142 receives several other inputs including inputs from a program mode switch 150. The program mode switch 150 is mounted on the PC board and extends through the casing 111 such that a programmer can depress the switch and place the microcontroller 142 in a program mode whereby the microcontroller 142 can be programmed in the manner described below in conjunction with Figure 5A.

The remote interface circuit 110 also includes several output devices including a local stereo control indicator 156 comprised of an LED D4 that is mounted on the PC

board and is visible through the casing 111. The microcontroller 142 is adapted to provide a visual indication, via the local stereo control indicator 156, to the programmer when the microcontroller 142 has received a signal from the local stereo controls 106.

Similarly, the interface circuit 110 also includes a handheld remote learn indicator 162 that is comprised of an LED D2 in series with a current limiting resistor R9 connected to the microcontroller 142. The handheld remote learn indicator 162 is preferably mounted to the casing 111 so as to be visible by the programmer and the microcontroller 142 is programmed so as to be able to provide a visual indication to the programmer when the microcontroller 142 has received a signal from the handheld remote control 160.

The remote interface circuit 110 also includes the output signal transmitter 154 which is comprised of an IR LED D3, a driver transistor Q1, a series base current limiting resistor R4, a current limiting resistor R5 and the output switching port at pin 10 of the microcontroller 142. The IR LED D3 is capable of reproducing the wireless signals previously stored in the memory 144. The output signal transmitter 154 receives these signals via the transmission cable 112 so that the wireless signals can be transmitted to the replacement in-dash stereo 104 in a manner that will be described in greater detail in conjunction with Figures 5A and 5B.

Figure 4A also illustrates a crystal controlled clock 153 comprised of a 4 MHz crystal Y1 in parallel with capacitors C2 and C1 to form an oscillator and which provides a clocking signal to the microcontroller 142. Moreover, the remote interface circuit 110 also includes a voltage regulator circuit 155 that is comprised of a voltage regulator U3, an output filter capacitor C4, and an input filter capacitor C3. The voltage regulator U3 provides a steady state +5vdc output which is adapted to supply the excitation voltage for the non-volatile memory 144, the microcontroller 142, the detector stage 152, and the output signal transmitter 154.

Figure 4A illustrates one particular implementation of the remote interface circuit 110. As illustrated, the remote interface circuit 110 receives signals from local stereo control devices, such as steering wheel buttons or switches, passenger switches, handlebar switches and the like, and then translates these signals into signals that are recognizable by the replacement in-dash stereo 104. In this particular implementation, the interface circuit 110 provides corresponding wireless signals, such as IR signals, to

the replacement in-dash stereo 104 upon receipt of corresponding input signals from the local stereo controls 106. It will be appreciated that the exact configuration of the remote interface circuit 110 can vary depending upon the configuration of the vehicle and the replacement stereo receiver 104 without departing from the present invention. For example, Figures 4B and 4C illustrate several other manners in which local stereo controls 106 are implemented in different types of vehicles.

Figure 4B illustrates an alternative configuration of a local stereo control 106', which uses a resistor ladder configuration such that each switch closure selection on the local stereo control 106' connects a different value resistor to the vehicle ground. In particular, if switch Sw1 is depressed on the local stereo control 106', then resistor Ra will be placed in series with fixed resistor Rk and +5vdc will provide the excitation voltage across the combined resistance of (Ra + Rk) producing a specific voltage drop across Ra. This specific voltage drop across Ra is fed to an A-to-D input port of the microcontroller 142 that corresponds to the selected switch function Sw1. Moreover, sequential switch selections by Sw1, Sw2, Sw3, etc. create specific voltage drops that are sampled by the microcontroller 142 and are used in both the program mode and the run mode in the previously described manner.

Similarly, Figure 4C illustrates another embodiment of a local stereo control 106'' used by a number of automobile manufacturers. In particular, this embodiment is shown with a microprocessor and a plurality of switches, wherein each switch closure on the local stereo control 106'' generates a unique serial data command that is adapted to be accepted by the microcontroller 142 via a digital input port.

Figure 5A is a flowchart which illustrates a program mode 210 of operation of one embodiment of the remote interface circuit 110 wherein a programmer programs the remote interface circuit 110 to send appropriate wireless signals to an after-market in-dash stereo 104 in response to receiving signals from local stereo controls 106. Advantageously, the remote interface circuit 110 can be programmed by the programmer using the vehicle's local stereo controls 106 and the handheld remote control 160. The programmer simply manipulates a particular stereo control 106, 114, 130 and then depresses a corresponding button on the handheld remote control 160 to program the remote interface circuit 110 so that the remote interface circuit 110 can send the appropriate wireless signal to the replacement in-dash stereo 104.

In particular, as shown in Figure 5A, the microcontroller 142, from a start state 200, checks the configuration of the microcontroller 142 ports in state 202 and determines, in decision state 204, whether the program mode switch 150 located on the casing 111 of the remote interface circuit 110 has been selected. If the microcontroller 142 determines, in decision state 204, that the program mode switch 150 has not been selected, the microcontroller 142 then enters a run mode 206, wherein the microcontroller 142 is in an operational state that will be described in greater detail in reference to Figure 5B.

If the microcontroller 142 has determined, in decision state 204, that the program mode switch 150 was selected, the microcontroller 142 enters the program mode 210 and performs a visual indication, in state 210, that the microcontroller 142 is awaiting a control signal from the local stereo controls 106. In this embodiment, the microcontroller 142 illuminates the local stereo control indicator 156 located on the casing 111 of the remote interface circuit 110.

The microcontroller 142 waits to receive a signal from the local stereo controls 106 in state 212. In particular, the programmer selects one of the stereo controls 106, 114, 130 and this results in a stereo control signal being provided to the microcontroller 142 in the manner described above. The microcontroller 142 then ascertains, in decision state 214, whether the local stereo control signal has been received. If the microcontroller 142 determines that a local stereo control input has been received, the microcontroller 142 stores the local control signal in the non-volatile memory 144 in state 216. The microcontroller 142 also provides a visual indication of acknowledgement to the programmer that the control signal was received in state 220, wherein the light emitting diode D4 of the local stereo control indicator 156 is activated.

The microcontroller 142 then provides, in state 222, a visual indication to the programmer that the microcontroller 142 is awaiting a remote signal from the handheld remote control 160. The visual indication to the programmer is provided by the handheld remote learn indicator 162, wherein the light emitting diode D2 located on-board the remote interface circuit 110 is turned on. The microcontroller 142 then awaits a signal from the handheld remote control 160 in state 224. The signal from the handheld remote control 160 is produced in response to the programmer depressing a button that has the same function as the stereo control 106, 114 or 130 previously

activated by the programmer and detected by the microcontroller 142 in state 212. The signal is provided by the handheld remote control 160 to the microcontroller 142 via the signal detector stage 152 in the previously described manner.

The microcontroller 142 continues to await the signal from the handheld remote control 160 until the microcontroller 142 determines, in decision state 226, that such a signal has been received. Once the remote control signal is received, the microcontroller 142 stores the received remote control signal pattern to non-volatile memory 144, in storage state 230, and preferably, in association state 232, associates the wireless remote signal pattern to the corresponding control input defined in state 216. In this embodiment, the association or mapping is done by storing the signal corresponding to the received wireless signal from the handheld remote control 160 in a data location in the non-volatile memory 144 adjacent the data location for the corresponding local stereo control signal. Hence, for each local stereo control signal, a corresponding handheld remote control signal can be stored in the non-volatile memory 144 such that subsequent activation of the stereo controls 106, 114, 130 will enable the microcontroller 142 to recall the corresponding wireless signal from the non-volatile memory 144 and produce the corresponding wireless signal via the output signal transmitter 154 in a manner that will be described in greater detail below.

Upon the completion of the association state 232, the microcontroller 142 determines, in decision state 234, whether the programming has been completed. If the programming has not been completed the microcontroller 142 returns to a state 210 where the microcontroller 142 awaits the next stereo control 106, 114, 130 signal. In this way, the programmer can continue programming the remote interface circuit 110 to store input signals from the local stereo controls 106 mounted within the vehicle and also store and map corresponding input signals from the handheld remote control 160 that is used to control the replacement stereo. If the programming has been completed, the microcontroller 142 enters a run mode 206.

Figure 5B is a flow chart which illustrates the operation of the remote interface circuit 110 in a run mode 206 wherein the remote interface circuit 110 can receive signals from any of the stereo controls 106, 114, 130 and then provide corresponding output signals that are recognizable by the replacement in-dash stereo 104. In particular, the microprocessor 142, from a start state 250, awaits a control signal from

the stereo controls 106, 114, 130 in state 252. As discussed above, the stereo controls 106, 114, 130 can be comprised of the local stereo controls 106 or the alternate stereo controls 114 or both, illustrated in Figure 1, the handlebar stereo controls 130 from a motorcycle 116, illustrated in Figures 2A and 2B, or any other control that is remotely located from the face of the in-dash stereo 104.

Upon the microprocessor 142 determining, in decision state 254, that a local control signal has been received from the local stereo control 106, the microcontroller 142 then matches, in state 252, the received local control signal with a previously stored output signal in the memory 144. As discussed above in connection with the description of the program mode 210 of the microcontroller 142 in Figure 5A, by sequentially programming each of the stereo controls 106, 114, 130 with the corresponding button on the handheld remote control 160, the microcontroller 142 is able to map these two signals such that the microprocessor 142 is capable of recalling the corresponding output signal from the non-volatile memory 144. In other words, the microcontroller 142, upon receipt of the input signal from the local stereo control 106, recalls, from the memory 144, a digital signal that can then be used to generate an appropriate output signal via the output signal transmitter 154 that will be recognizable by the replacement in-dash stereo 104.

The microcontroller 142 then determines, in decision state 260, whether a match has occurred and, if a match has occurred, the microcontroller then recalls the corresponding remote signal pattern from the memory 144, in state 262, and then outputs the appropriate IR signal via the output signal transmitter 154, in state 264. As discussed above, the replacement in-dash stereo 104 is preferably adapted to receive signals, such as wireless signals, including I/R signals, from the handheld remote control 160. Preferably, the microcontroller 142 is programmed such that it is capable of reproducing the same wireless signal that would be provided by the handheld remote control 160.

Hence, the user can program the remote interface circuit 110 such that controls, such as increase or decrease volume, change channels and the like, on the steering wheel 102 or some other remote location within the vehicle can be used to generate corresponding wireless signals from the remote interface circuit 110. The remote interface circuit 110 thereby allows factory installed vehicle remote controls for a

factory stereo to continue to be used with a replacement stereo receiver. This greatly increases the flexibility for individuals wishing to replace their factory stereos as it does not eliminate the utility of the remote vehicle controls.

Figure 6 illustrates another embodiment of the present invention in which a voice control interface 108 is adapted to respond to spoken voice commands 310 and transmit corresponding signals to an aftermarket in-dash stereo 104. The voice commands 310 are spoken words or phrases that a user desires to use to control features of a motor vehicle, such as a stereo control unit or receiver. The voice control interface 108 functions in a similar manner to that previously described for the remote control stereo interface system 100 with local stereo controls 106 except that the inputs to the voice control interface 108 are spoken voice commands 310 rather than the manipulation of local stereo controls 106. Otherwise the components, functions, and features of the voice control interface 108 are substantially similar to those previously described for the remote control stereo interface 100.

The voice control interface 108 comprises a microphone assembly 105 and a voice recognition module 107. The microphone assembly 105 is adapted to transduce voice commands 310 in the normal range of human hearing from approximately 20 Hz to 20kHz and send a corresponding analog electrical signal along an attached cable in a manner well known in the art. The microphone assembly 105 is a commonly available industry standard miniature microphone. A first end of the microphone assembly 105 is connected to an input of the voice recognition module 107. A second end of the microphone assembly 105 is placed adjacent the driver or passenger so as to readily pick up voice commands 310. The microphone assembly 105 is preferably placed behind the dashboard 103 or in another location so as to be unobtrusive to the driver or passengers.

The voice control interface 108 also comprises a voice recognition module 107. The voice recognition module 107 is preferably a speaker-dependent commercially available item such as the type HM2007 available from Images Company of Staten Island, NY or the Voice Direct™ 364 available from Sensory, Inc. of Sunnyvale, CA. The voice recognition module 107 is provided with on-board memory to store digitized sound patterns. The voice recognition module 107 is provided with inputs adapted to receive analog electrical signals from the microphone assembly 105. The voice

recognition module 107 includes an analog-to-digital converter (A-to-D). The A-to-D continuously converts the analog signals received from the microphone assembly 105 to digital equivalents. The voice recognition module 107 continuously compares the digitized audio patterns to stored voice command 310 patterns. When the voice
5 recognition module 107 recognizes a match with a stored voice command 310, the voice recognition module 107 sends a serial digital signal corresponding to the stored voice command 310 to a microcontroller 142 via the outputs of the voice recognition module 107 in a manner well known in the art.

The voice control interface 108 also comprises a microcontroller 142. The
10 microcontroller 142 is adapted to receive electrical signals from the voice recognition module 107 and the microphone 105 for the purpose of controlling the replacement in-dash stereo 104. The microcontroller 142 is also adapted to receive a signal from a detector stage 152 from a handheld remote control 160. As is well understood in the art, the detector stage 152 is adapted to receive and demodulate a wireless signal sent by
15 a handheld remote control 160 for the in-dash stereo 104. As will be described in greater detail below, the microcontroller 142 is preferably adapted to be able to receive, from the handheld remote control 160, the wireless signal for controlling a particular stereo function, store this signal and then reproduce and broadcast this signal to the after-market in-dash stereo 104 when a voice command 310 is spoken corresponding to
20 the function of the stored signal.

The voice control interface 108 also comprises non-volatile memory 144. The non-volatile memory 144 is adapted to store digital messages corresponding to the IR patterns sent by the handheld remote control 160 and be able to provide these messages to the microcontroller 142 as needed in the manner previously described.

The voice control interface 108 also comprises a transmission cable 112. In this
25 embodiment, the transmission cable 112 includes an output signal transmitter 154 that is located in line of sight of a remote signal receiver (not shown) on the after-market in-dash stereo 104. The transmission cable 112 is generally 4 feet in length and is positioned in the vehicle dashboard 103 such that the tip of the transmission cable 112 that is comprised of the output signal transmitter 154 is positioned generally within
30 close proximity of the in-dash stereo 104. The transmission cable 112 is connected to the microprocessor 142 and the transmission cable 112 and attached output signal

transmitter 154 are adapted to transmit wireless IR signals that the microcontroller 142 has retrieved from the non-volatile memory 144 and which correspond to control signals sent by the handheld remote control 160.

The voice control interface 108 also comprises a voice command select switch 109. The voice command select switch 109 in this embodiment is a ten position rotary switch of a type well known in the art. The voice command select switch 109 is connected to the microcontroller 142 and allows the voice control interface 108 to learn up to ten different voice commands 310 in a manner that will be described in greater detail below.

The voice control interface 108 also comprises a learn voice command indicator 158 and a handheld remote learn indicator 162. The learn voice command indicator 158 and handheld remote learn indicator 162 are light emitting diodes (LED's) and provide the user a visual indication of the status of the programmability of voice commands 310 in a manner that will be described in greater detail below.

The voice control interface 108 also comprises a program mode select switch 150. The program mode select switch 150, when selected, instructs the microcontroller 142 to enter a program mode, allowing the microcontroller 142 to learn and record the specific voice commands 310 and IR command signals from the handheld remote control 160 in a manner that will be described in greater detail below.

It can be appreciated that the voice control interface 108 can be readily adapted to function with the local stereo controls 106 previously described in conjunction with the voice commands 310 herein described. The voice control interface 108 can also be readily provided with auxiliary outputs 334 adapted to control other features of a motor vehicle such as raising and lowering windows, locking or unlocking doors, moving seats, switching on headlights, etc. The auxiliary outputs 334 can be adapted to control the features of the vehicle directly or can operate relays and the like in a manner well understood by those skilled in the art.

Figure 7 shows the operation of the voice control interface 108 in a program mode 320. From a power on 300 state, the voice control interface 108 determines the position of the program mode select switch 150 in a decision state 302. If the voice control interface 108 determines, in the decision state 302, that the program mode select switch 150 is in the program position, the voice control interface 108 enters the program

mode 320. The user then positions the voice command select switch 109 to the desired position, in a state 303. The voice command select switch 109 allows the user to select and program up to ten different voice commands 310.

5 The voice control interface 108 provides an indication, in state 304, that the voice control interface 108 is ready to receive and program a voice command 310. The indication in state 304 is provided by the learn voice command indicator 158 illuminating. While the voice control interface 108 is indicating, in state 304, that the voice control interface 108 is ready to receive and program a voice command 310, the voice control interface 108 determines, in decision state 306, whether a voice command
10 310 has been received by the voice control interface 108. Once the user speaks a voice command 310, the voice recognition module 107 digitizes and stores the sound pattern of the voice command 310 in the on-board memory location corresponding to the voice command 310 selected by the voice command select switch 109 in a storage state 308.

15 The voice control interface 108 then provides, in state 312, a visual indication to the programmer that the voice control interface 108 is awaiting a signal from the handheld remote control 160. The visual indication to the programmer is provided by the handheld remote learn indicator 162, wherein the light emitting diode D2 is turned on. The voice control interface 108 then awaits a signal from the handheld remote control 160, in state 312. The signal from the handheld remote control 160 is produced
20 in response to the programmer depressing a button that has the same function as the voice command 310 previously spoken by the programmer and stored by the voice recognition module 107, in state 308. The signal is provided by the handheld remote control 160 to the voice control interface 108 via the signal detector stage 152 in the previously described manner.

25 The voice control interface 108 awaits a signal from the handheld remote control 160 until the voice control interface 108 determines, in decision state 314, that such a signal has been received. Once the remote control signal is received, the voice control interface 108 stores the received remote control signal pattern to non-volatile memory 144, in storage state 316, and preferably, in association state 318, associates the wireless
30 remote signal pattern to the corresponding voice command 310 defined in state 308. In this embodiment, the association or mapping is done by storing the signal corresponding to the received wireless signal from the handheld remote control 160 in a

data location in the non-volatile memory 144 adjacent the data location for the corresponding voice command 310. Hence, for each voice command 310, a corresponding handheld remote control signal can be stored in the non-volatile memory 144 such that subsequent speaking of the voice command 310 will enable the microcontroller 142 to recall the corresponding wireless signal from the non-volatile memory 144 and produce the corresponding wireless signal via the output signal transmitter 154 in the manner previously described.

Upon the completion of the association state 318, the voice control interface 108 determines, in decision state 302, whether the program mode 320 is still selected. If the programming has not been completed the voice control interface 108 returns to state 303 where the user selects the next voice command 310 via the voice command select switch 109 and the voice control interface 108 awaits the next voice command 310. In this way, the programmer can continue programming the voice control interface 108 to store additional voice commands 310 and also store and map corresponding input signals from the handheld remote control 160. The voice control interface 108 provides the ability to write over programmed voice commands 310 thereby allowing the user to change the voice command 310 wording or to allow a subsequent user to reprogram the voice control interface 108 to recognize their voice patterns. If the programming has been completed, the voice control interface 108 enters a run mode 330.

Figure 8 illustrates the operation of the voice control interface 108 in the run mode 330. The voice control interface 108 and, in particular, the voice recognition module 107 is adapted to continuously monitor audio input via the microphone assembly 105, in state 322. The voice recognition module 107 is capable of continuous listening wherein the voice recognition module 107 digitizes the audio input from the microphone assembly 105 and compares, in a known manner, the digitized sound patterns to those stored in on-board memory as voice commands 310 in the program mode 320. When the voice recognition module 107 recognizes a match, in decision state 324, the voice recognition module 107 sends a serial signal to the microcontroller 142 corresponding to the recognized voice command 310 in state 326.

In state 328, the microcontroller 142 matches the received serial signal for a voice command 310 with the corresponding remote control signal previously stored in non-volatile memory 144 in the program mode 320 in the manner previously described.

The voice control interface 108 then sends the remote control signal to be transmitted via the output signal transmitter 154 in the manner previously described. The voice control interface 108 then returns to listening state 322.

It can be appreciated that the voice control interface 108 offers a program mode 320 wherein the user can program voice commands 310 as desired and enable the user to control a replacement in-dash stereo 104 with voice commands 310. The voice control interface 108 can write over the programmed voice commands 310 thereby allowing the user to change voice commands 310 or to allow subsequent users to program the voice control interface 108 for their own voice patterns. It can be appreciated that by using voice commands 310 the driver need not divert his attention away from the task of driving and can thereby change the operation of the stereo while still driving in a safe manner. The voice control interface 108 allows a user to retrofit convenient voice controls in an economical manner to a vehicle that did not originally come equipped with remote controls for the stereo.

Although the preferred embodiments of the present invention have shown, described and pointed out the fundamental novel features of the invention as applied to those embodiments, it will be understood that various omissions, substitutions and changes in the form of the detail of the device illustrated may be made by those skilled in the art without departing from the spirit of the present invention. Consequently, the scope of the invention should not be limited to the foregoing description but is to be defined by the appended claims.

WHAT IS CLAIMED IS:

1. A voice control interface device that receives at least one voice command and produces at least one output signal to a replacement stereo receiver installed in a vehicle to replace an originally installed stereo receiver so that the at least one voice command can be used to control the operation of the replacement stereo receiver.

2. The device of Claim 1, wherein the voice control interface device receives at least one voice command and outputs at least one wireless signal to a replacement stereo receiver corresponding to the at least one voice command.

3. The device of Claim 2, wherein the voice control interface device receives a first wireless signal from a handheld remote control upon a user depressing a first function key on the handheld remote control to change a first function of the operation of the replacement stereo receiver and wherein the voice control interface produces a signal corresponding to the first wireless signal in response to a user speaking a first voice command.

4. The device of Claim 3, wherein the voice control interface device includes a memory and is programmable so as to store wireless signals corresponding to the at least one voice command such that subsequent speaking of the at least one voice command results in a corresponding wireless signal being sent to the replacement stereo.

5. The device of Claim 4, wherein the memory is rewritable and the voice control interface device further comprises a switching device to enable the user to selectively reprogram voice commands.

6. The device of Claim 5, wherein the voice control interface device includes a wireless receiver and a wireless transmitter so that the voice control interface device can receive the first wireless signal from the handheld remote control and store a corresponding signal in the memory such that the voice control interface device can recall the stored signal and thereby generate a wireless signal corresponding to the first wireless signal so as to change the first function of the stereo receiver.

7. The device of Claim 6, wherein the voice control interface device is further provided with outputs to control at least one aspect of a vehicle such as turning on a light.

8. A stereo system for a vehicle comprising:

a replacement stereo receiver adapted to replace an original stereo receiver, wherein the replacement stereo receiver is mounted in a first location on the vehicle wherein the replacement stereo receiver is adapted to receive remote control signals to control the operation of the replacement stereo receiver; and

an interface device that is adapted to be positioned within the vehicle so as to be able to receive voice commands and, in response to receiving the voice commands, send output control signals corresponding to the remote control signals so as to control the operation of the replacement stereo such that voice commands can be used to control the replacement stereo via the interface device.

9. The system of Claim 8, wherein the voice control interface device receives at least one voice command and outputs at least one wireless signal to a replacement stereo receiver corresponding to the at least one voice command.

10. The system of Claim 9, wherein the voice control interface device receives a first wireless signal from a handheld remote control upon a user depressing a first function key on the handheld remote control to change a first function of the operation of the replacement stereo receiver and wherein the voice control interface produces a signal corresponding to the first wireless signal in response to a user speaking a first voice command.

11. The system of Claim 10, wherein the voice control interface device includes a memory and is programmable so as to store wireless signals corresponding to the at least one voice command such that subsequent speaking of the at least one voice command results in a corresponding wireless signal being sent to the replacement stereo.

12. The system of Claim 11, wherein the memory is rewritable and the voice control interface device further comprises a switching device to enable the user to selectively reprogram voice commands.

13. The system of Claim 12, wherein the voice control interface device includes a wireless receiver and a wireless transmitter so that the voice control interface device can receive the first wireless signal from the handheld remote control and store a

corresponding signal in the memory such that the voice control interface device can recall the stored signal and thereby generate a wireless signal corresponding to the first wireless signal so as to change the first function of the stereo receiver.

14. The system of Claim 9, wherein the voice control interface device is further provided with outputs to control at least one aspect of a vehicle.

15. A stereo system for a vehicle comprising:

a replacement stereo receiver adapted to replace an original stereo receiver, wherein the replacement stereo receiver is mounted in a first location on the vehicle wherein the replacement stereo receiver is responsive to at least one remote control signal such that upon receipt of the at least one remote control signal, the replacement stereo receiver alters the operation of the replacement stereo receiver; and

an interface device, positioned within the vehicle that is responsive to at least one remote signal from a person in the vehicle, wherein the interface device transmits the at least one remote control signal to the replacement stereo receiver upon receiving the at least one remote signal from a person in the vehicle.

16. The stereo system of Claim 15, wherein the at least one remote signal comprises a voice command produced by the person in the vehicle.

17. The stereo system of Claim 15, wherein the at least one remote signal comprises a local control signal from an existing local stereo control button positioned within the vehicle and adapted to control the originally installed stereo.

18. The stereo system of Claim 15, wherein the vehicle comprises a motorcycle and the at least one remote signal comprises a signal from at least one switch positioned adjacent the handlebars of the motorcycle.

19. The stereo system of Claim 15, wherein the interface device is adapted to receive at least one remote signal and is further adapted to produce a wireless signal to the replacement stereo receiver corresponding to the at least one remote signal.

20. The stereo system of Claim 15, wherein the replacement stereo receiver is adapted to receive a first wireless signal from a handheld remote control upon a user depressing a first function key on the handheld remote control to change a first function of the operation of the replacement stereo receiver and wherein the interface device

produces a signal corresponding to the first wireless signal in response to a user sending a first remote signal.

21. The stereo system of Claim 20, wherein the interface device includes a memory and is programmable such that a programmer can sequentially store wireless signals corresponding to the at least one remote control signal such that subsequent reception of the at least one remote control signal results in a corresponding wireless signal being transmitted to the replacement stereo receiver.

22. The stereo system of Claim 21, wherein the interface device includes a program mode wherein the interface device can be programmed by a programmer.

23. The stereo system of Claim 22, wherein the interface device includes a wireless receiver and a wireless transmitter so that the interface device can receive the first wireless signal from the handheld remote control and store a corresponding signal in the memory such that the interface device can recall the stored signal and thereby generate a wireless signal corresponding to the first wireless signal so as to change the first function of the stereo receiver.

REMOTE CONTROL INTERFACE FOR REPLACEMENT VEHICLE STEREOS

Abstract of the Disclosure

5 An interface device for interconnecting fixed controls of a vehicle to a replacement stereo. The interface device is capable of receiving control signals from fixed controls, such as steering wheel controls, backseat controls, handlebar controls, and the like, and then transmitting corresponding control signals to a replacement stereo. In one embodiment, the output signals from the interface device are comprised
10 of wireless signals, such as IR signals. In another embodiment, the interface device is programmable such that the interface device can be programmed to emit signals corresponding to the same signals that would be emitted from a handheld remote control sold in conjunction with an after-market stereo receiver. In another embodiment, the interface device is capable of recognizing spoken voice commands and
15 generating corresponding IR signals in order to effect control of a replacement stereo.

20 R:\DOCS\JWA\JWA-1016.DOC
021500

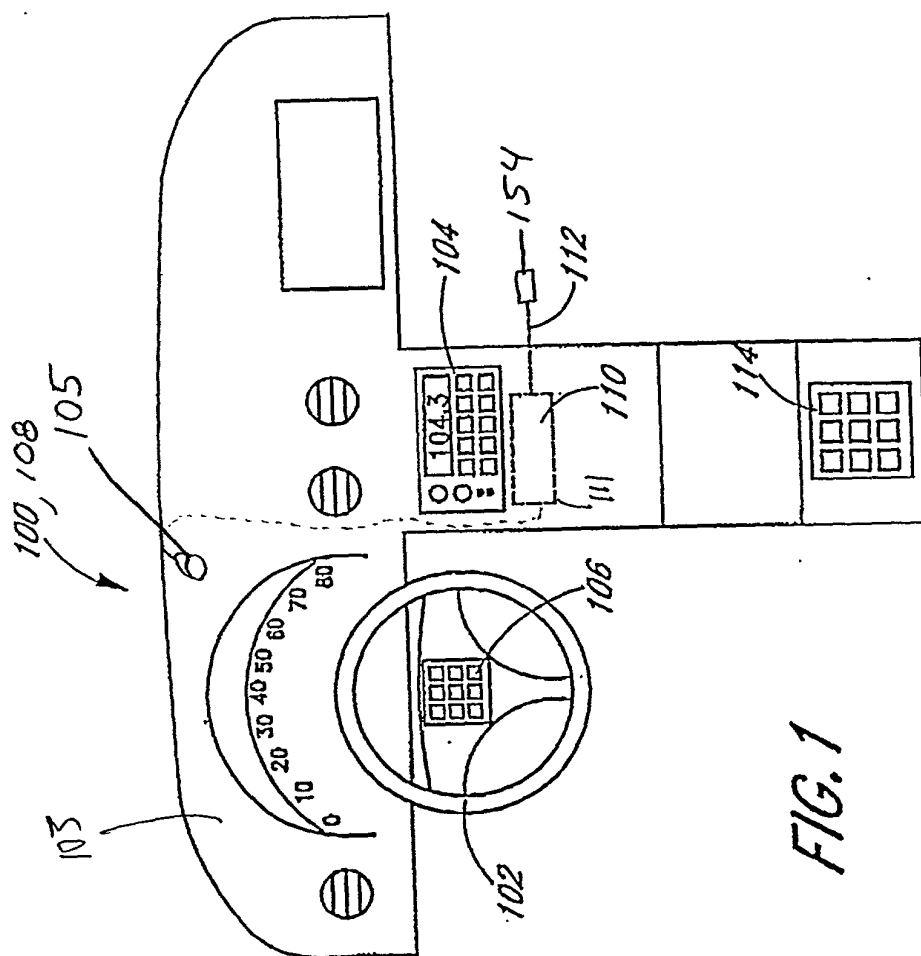


FIG. 1

101
L

Fig. 2B

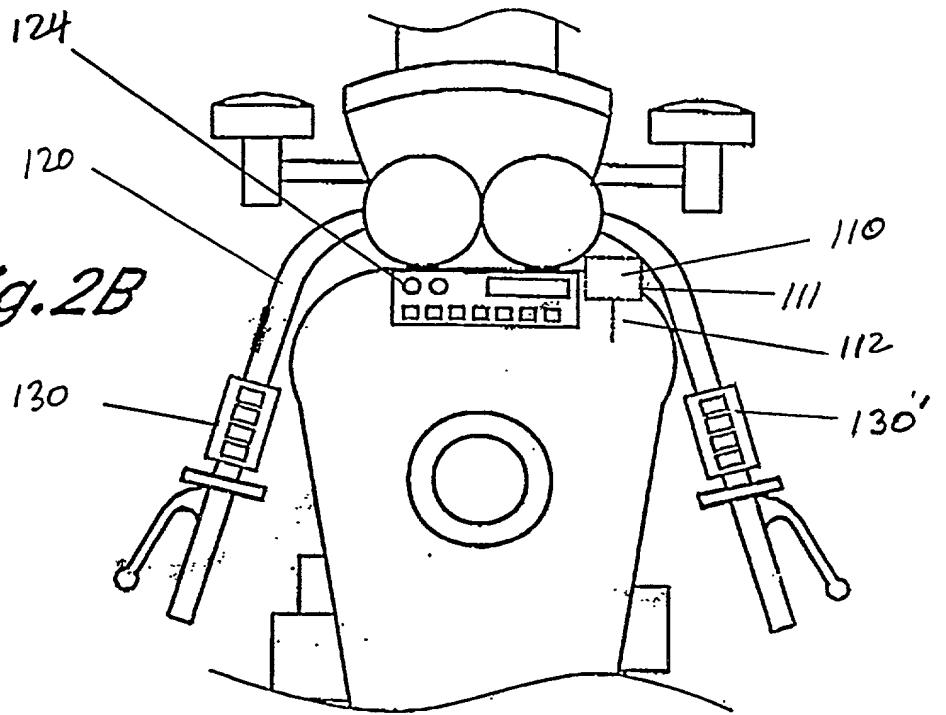
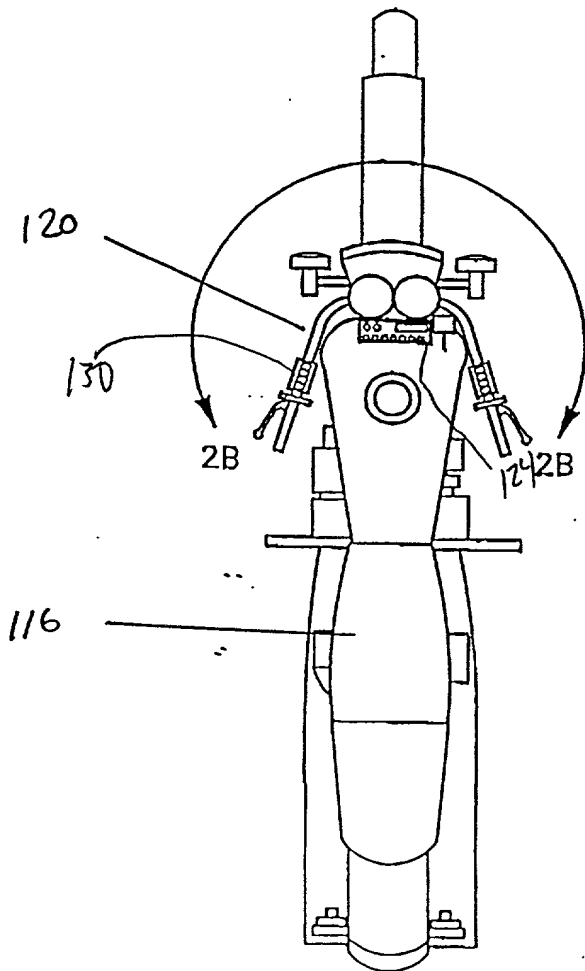


Fig. 2A



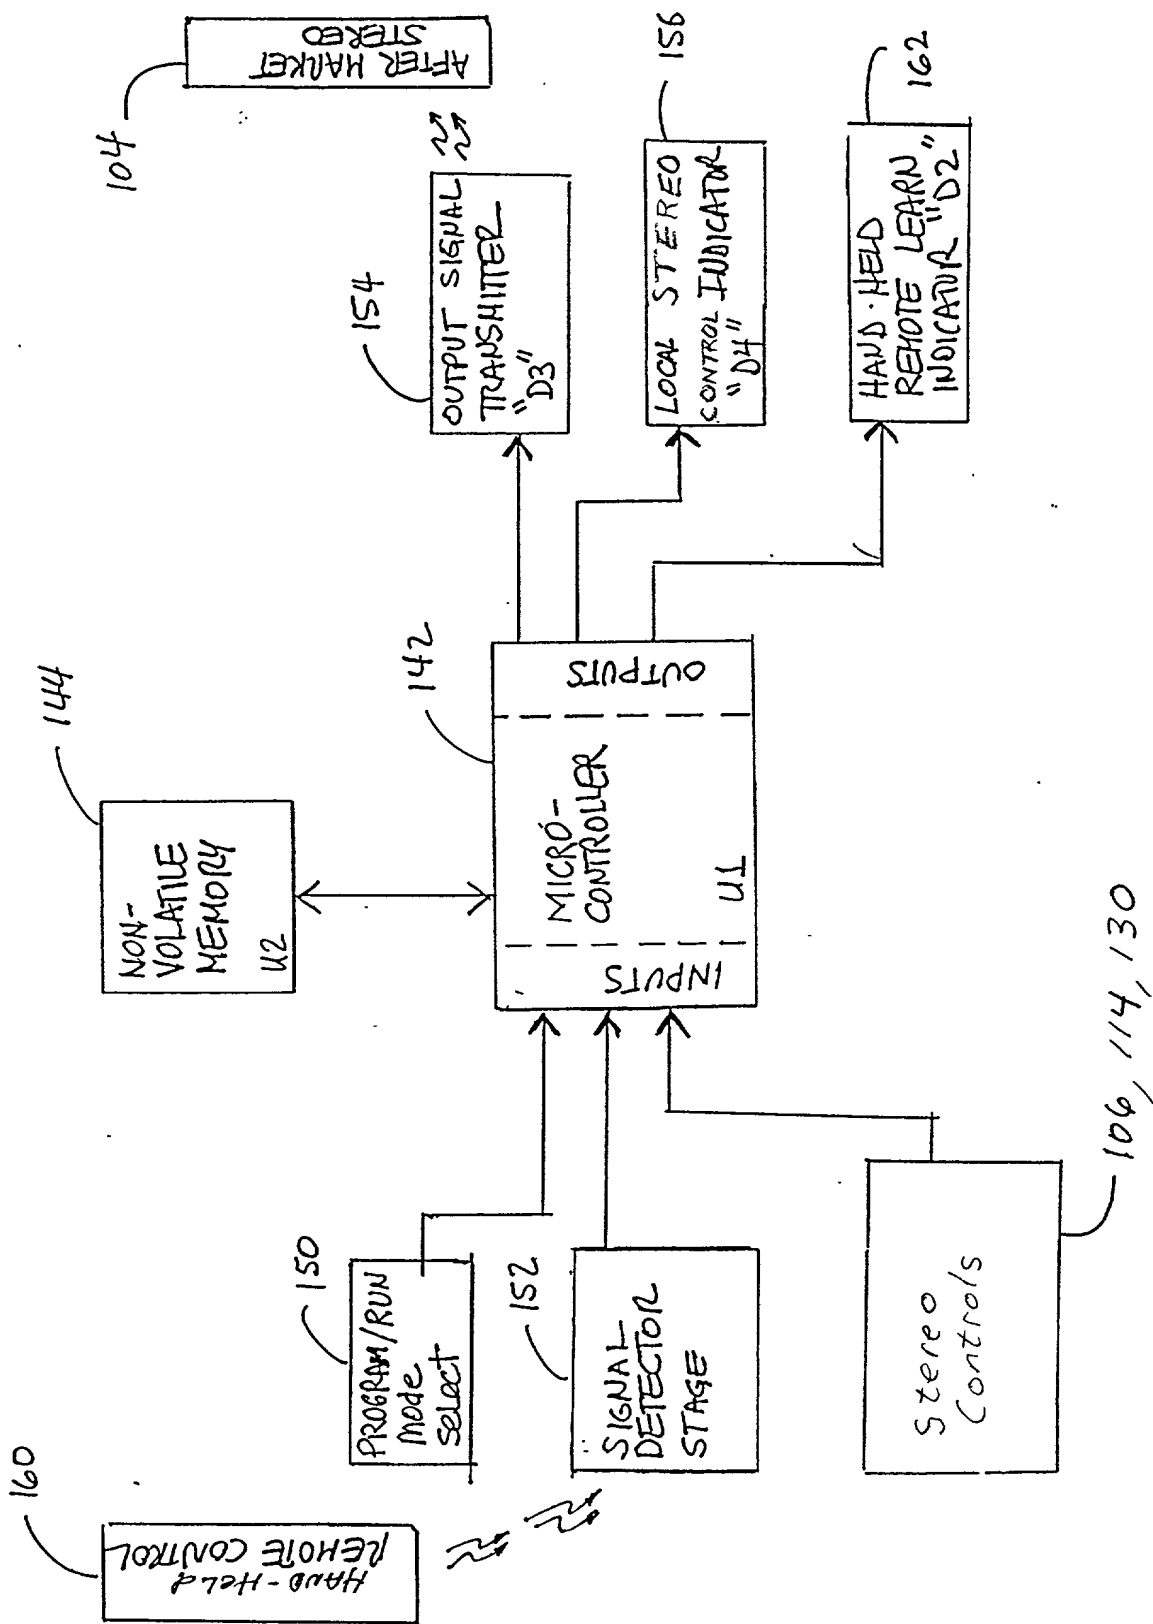


Fig. 3

FIG. 4B


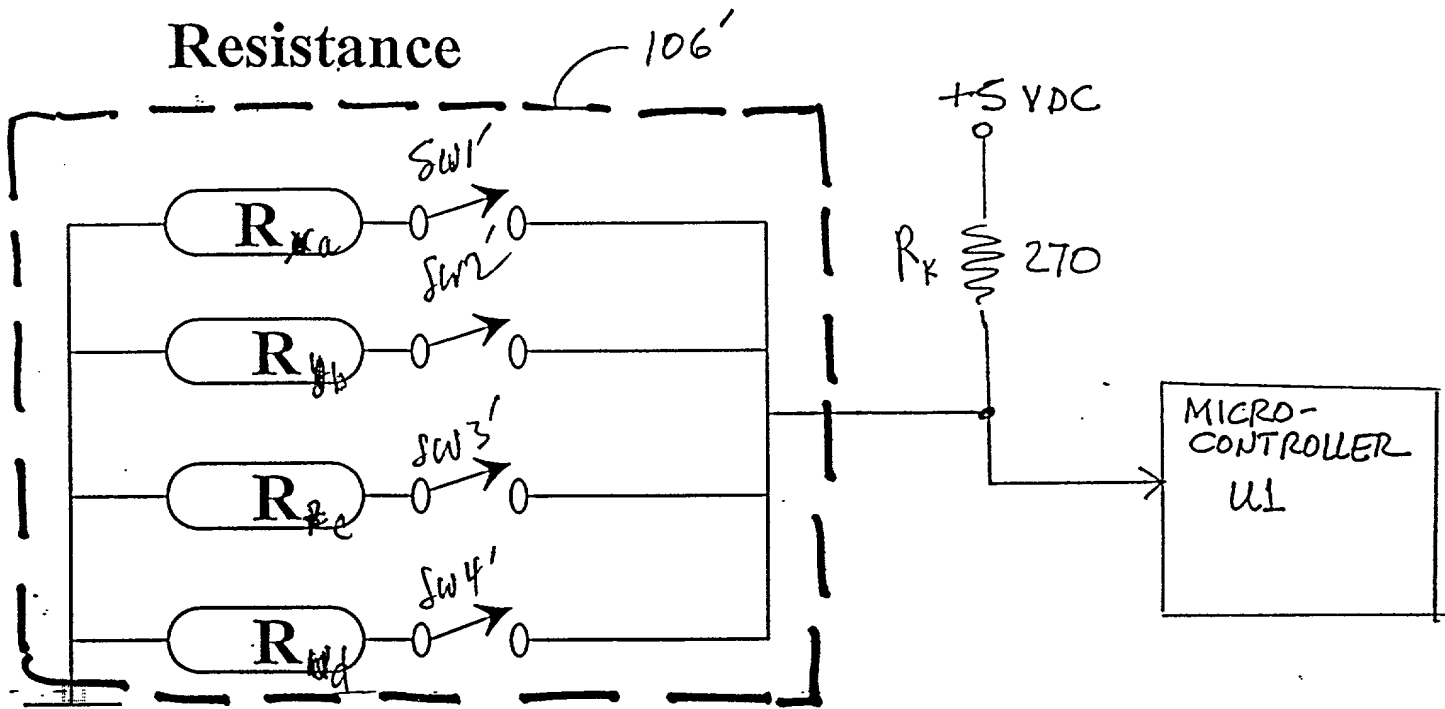


FIG. 4C

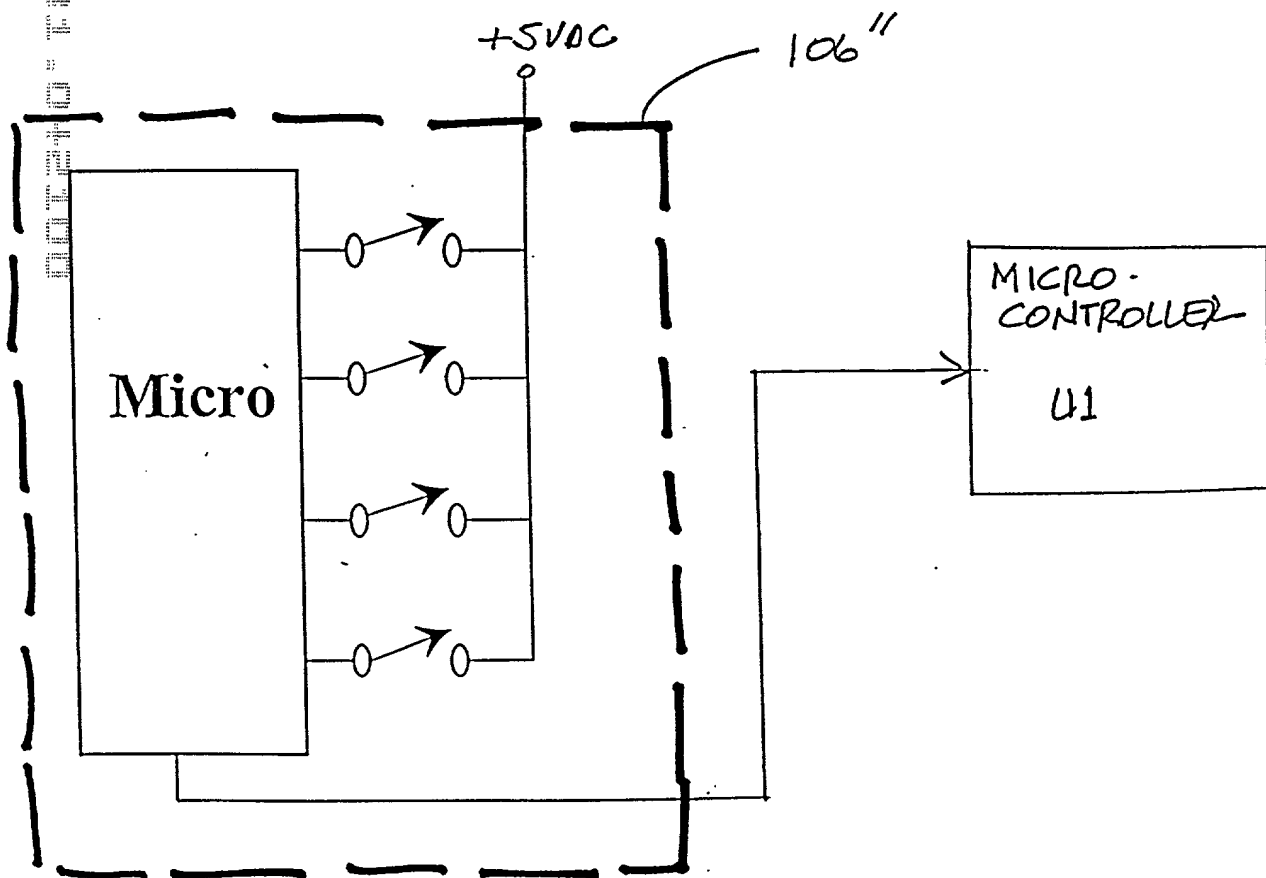

PROGRAM
MODE



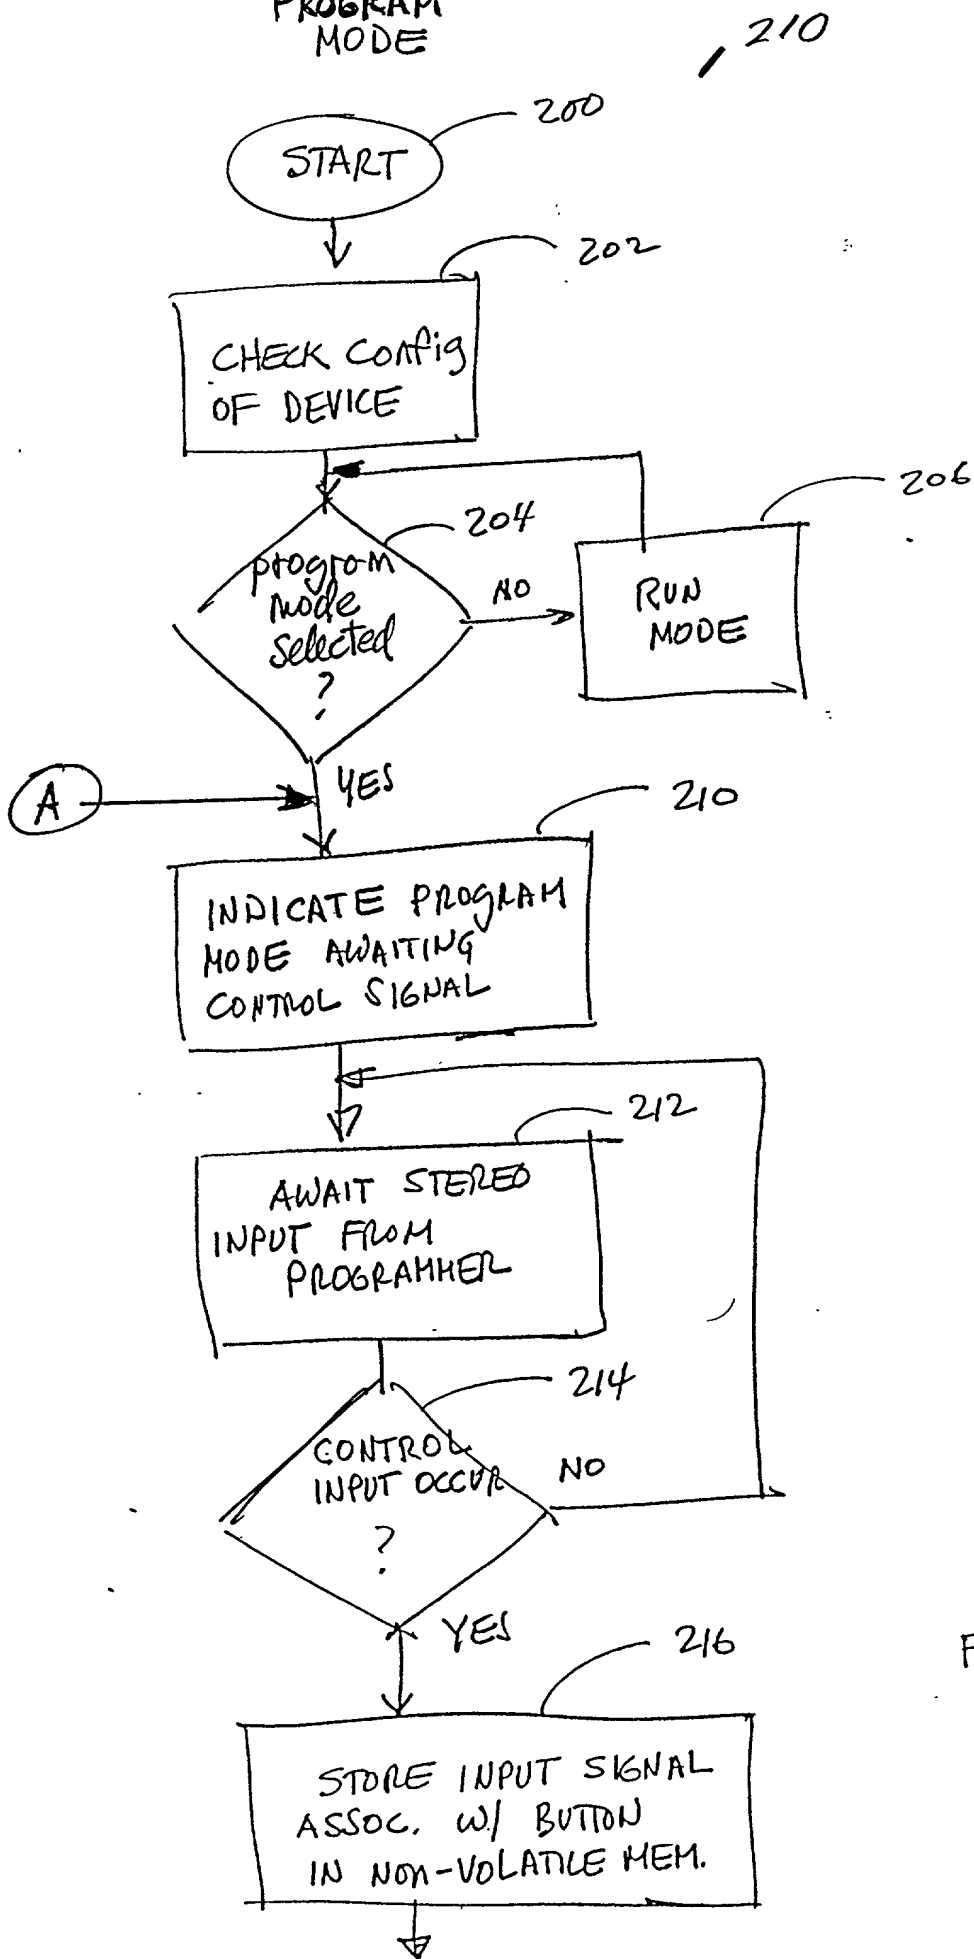


Fig. 5A-1

[illegible]

Run mode

FIGURE 5B

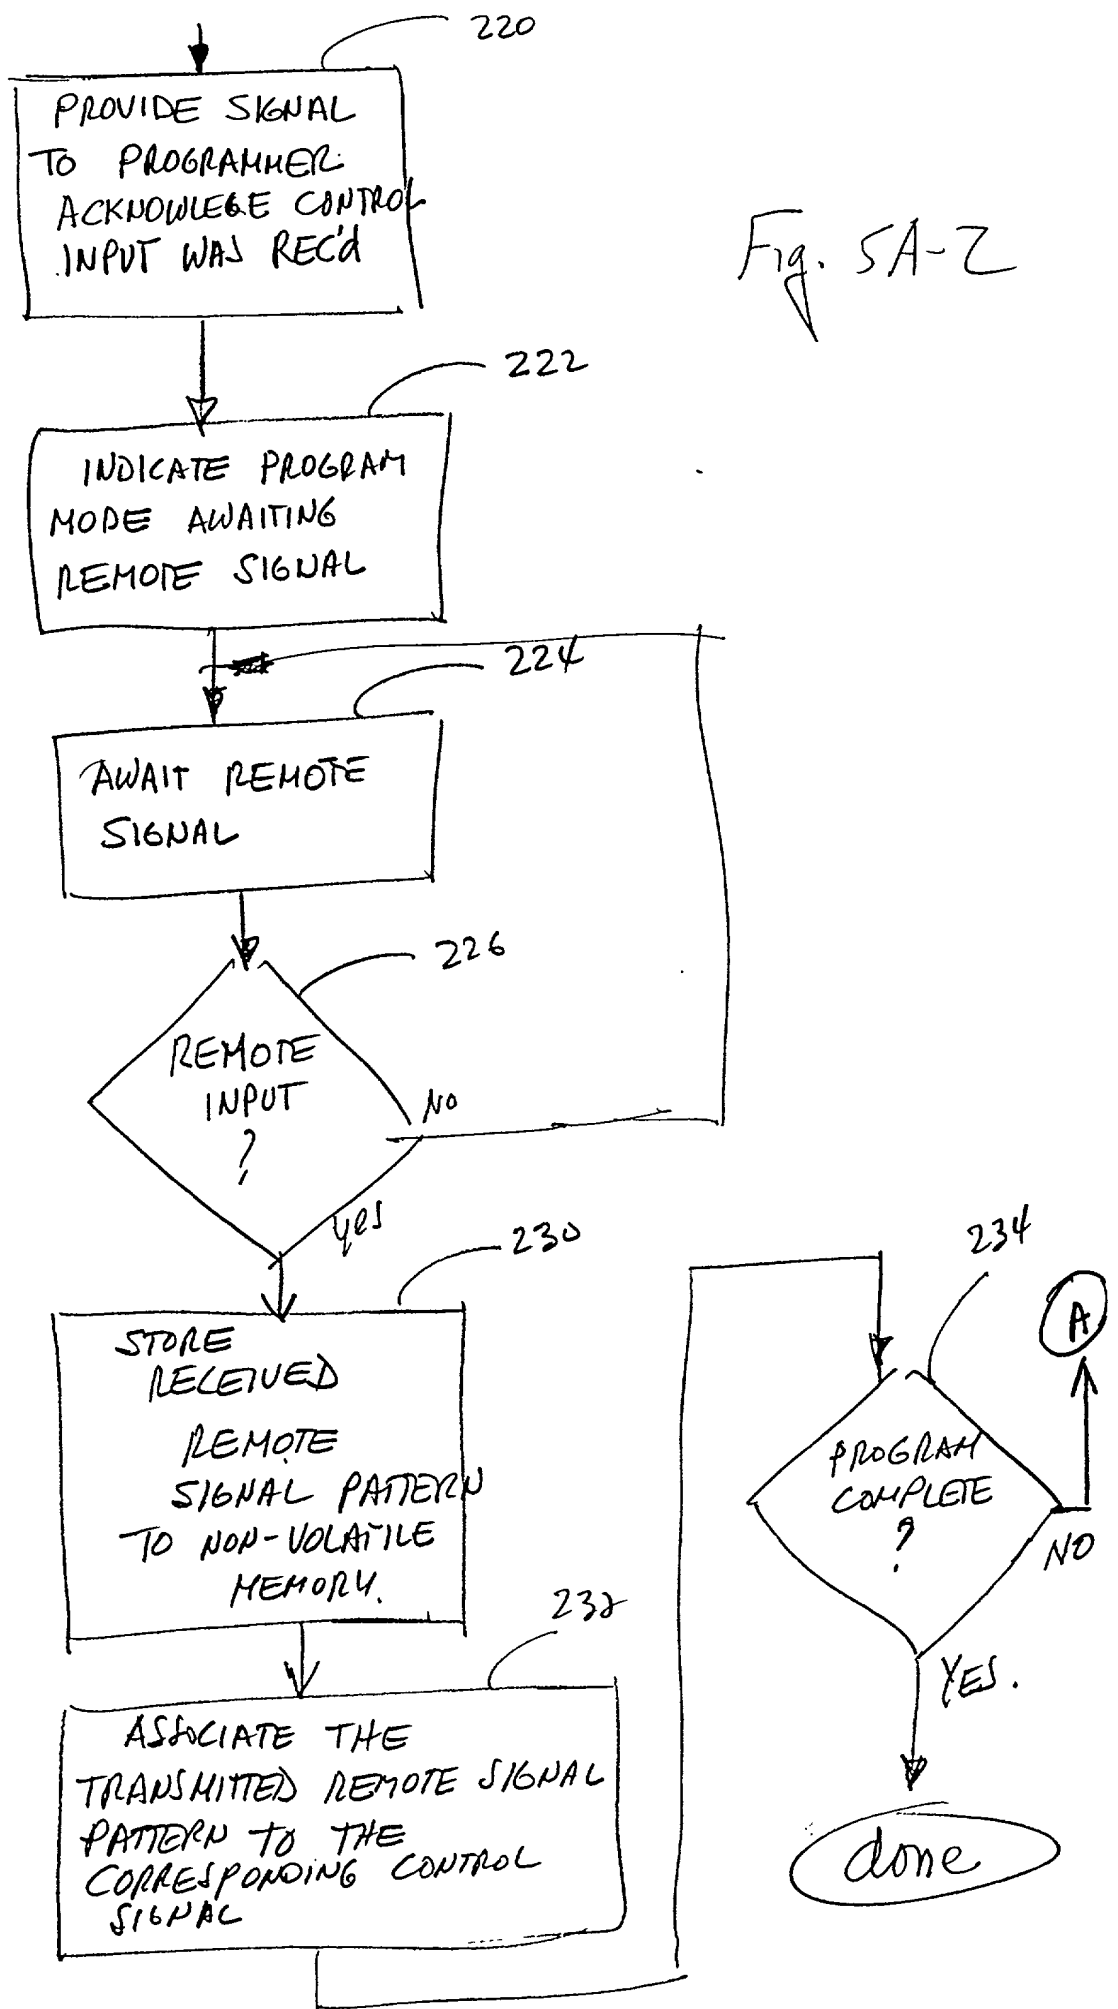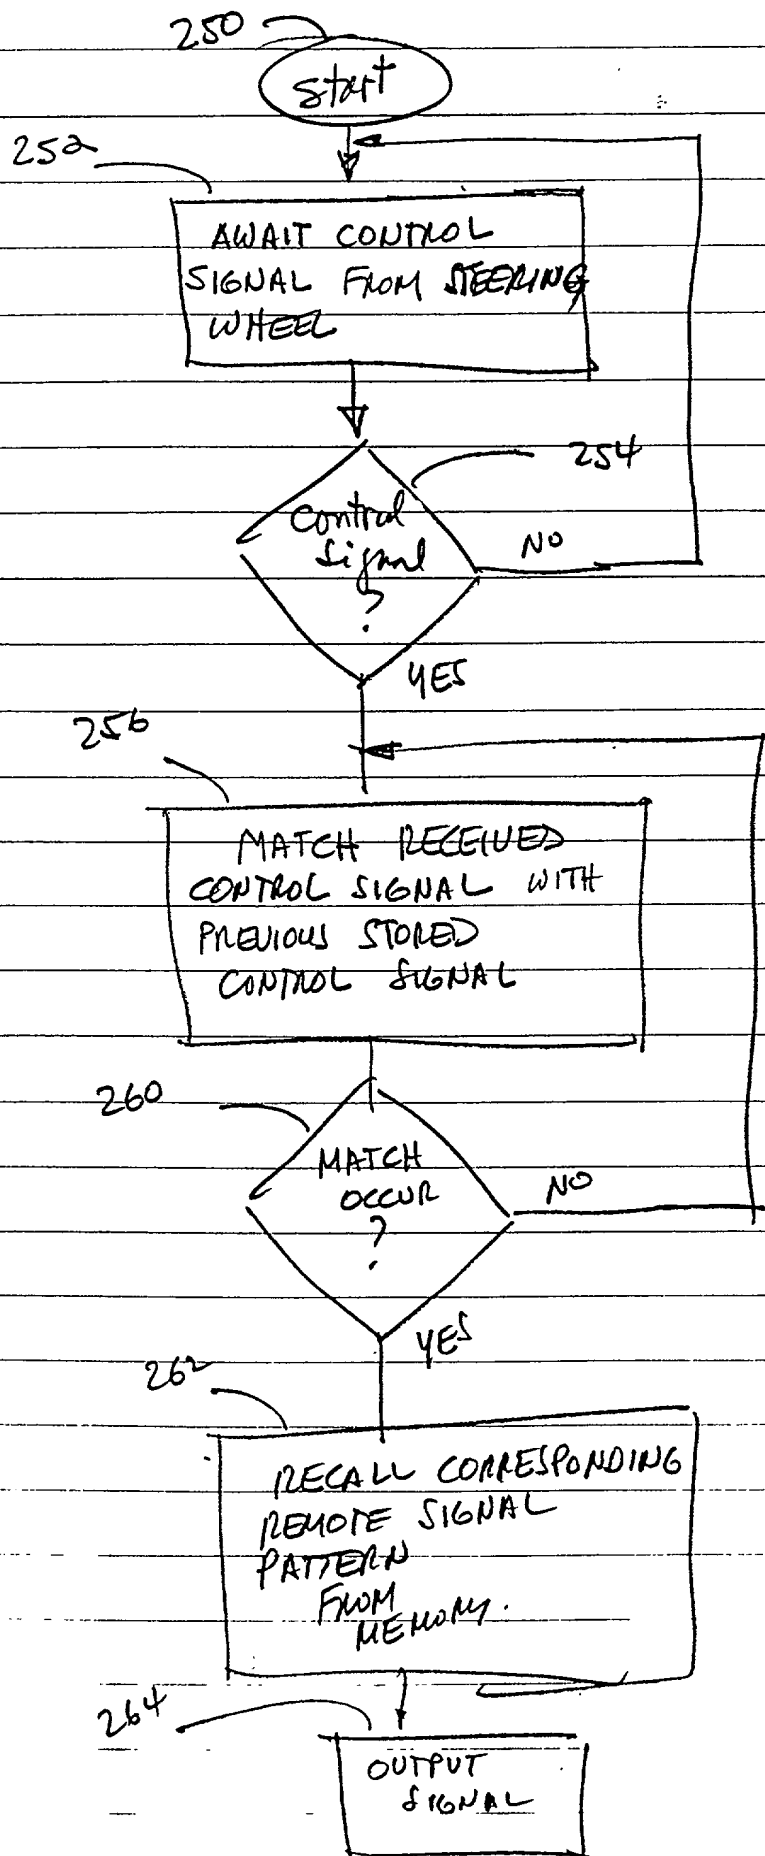

001490 1865560

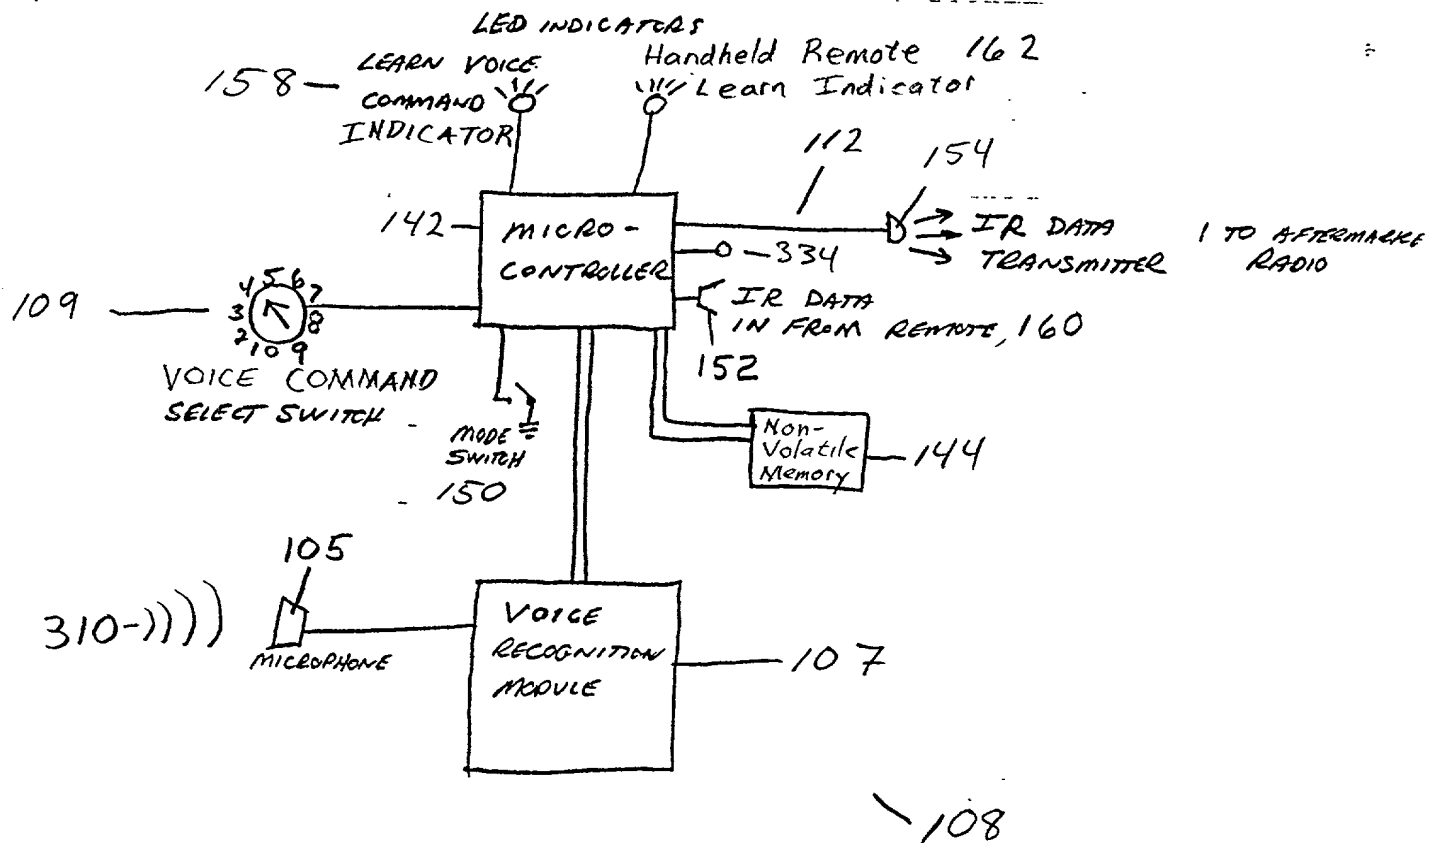


Figure 6

Program Mode 320

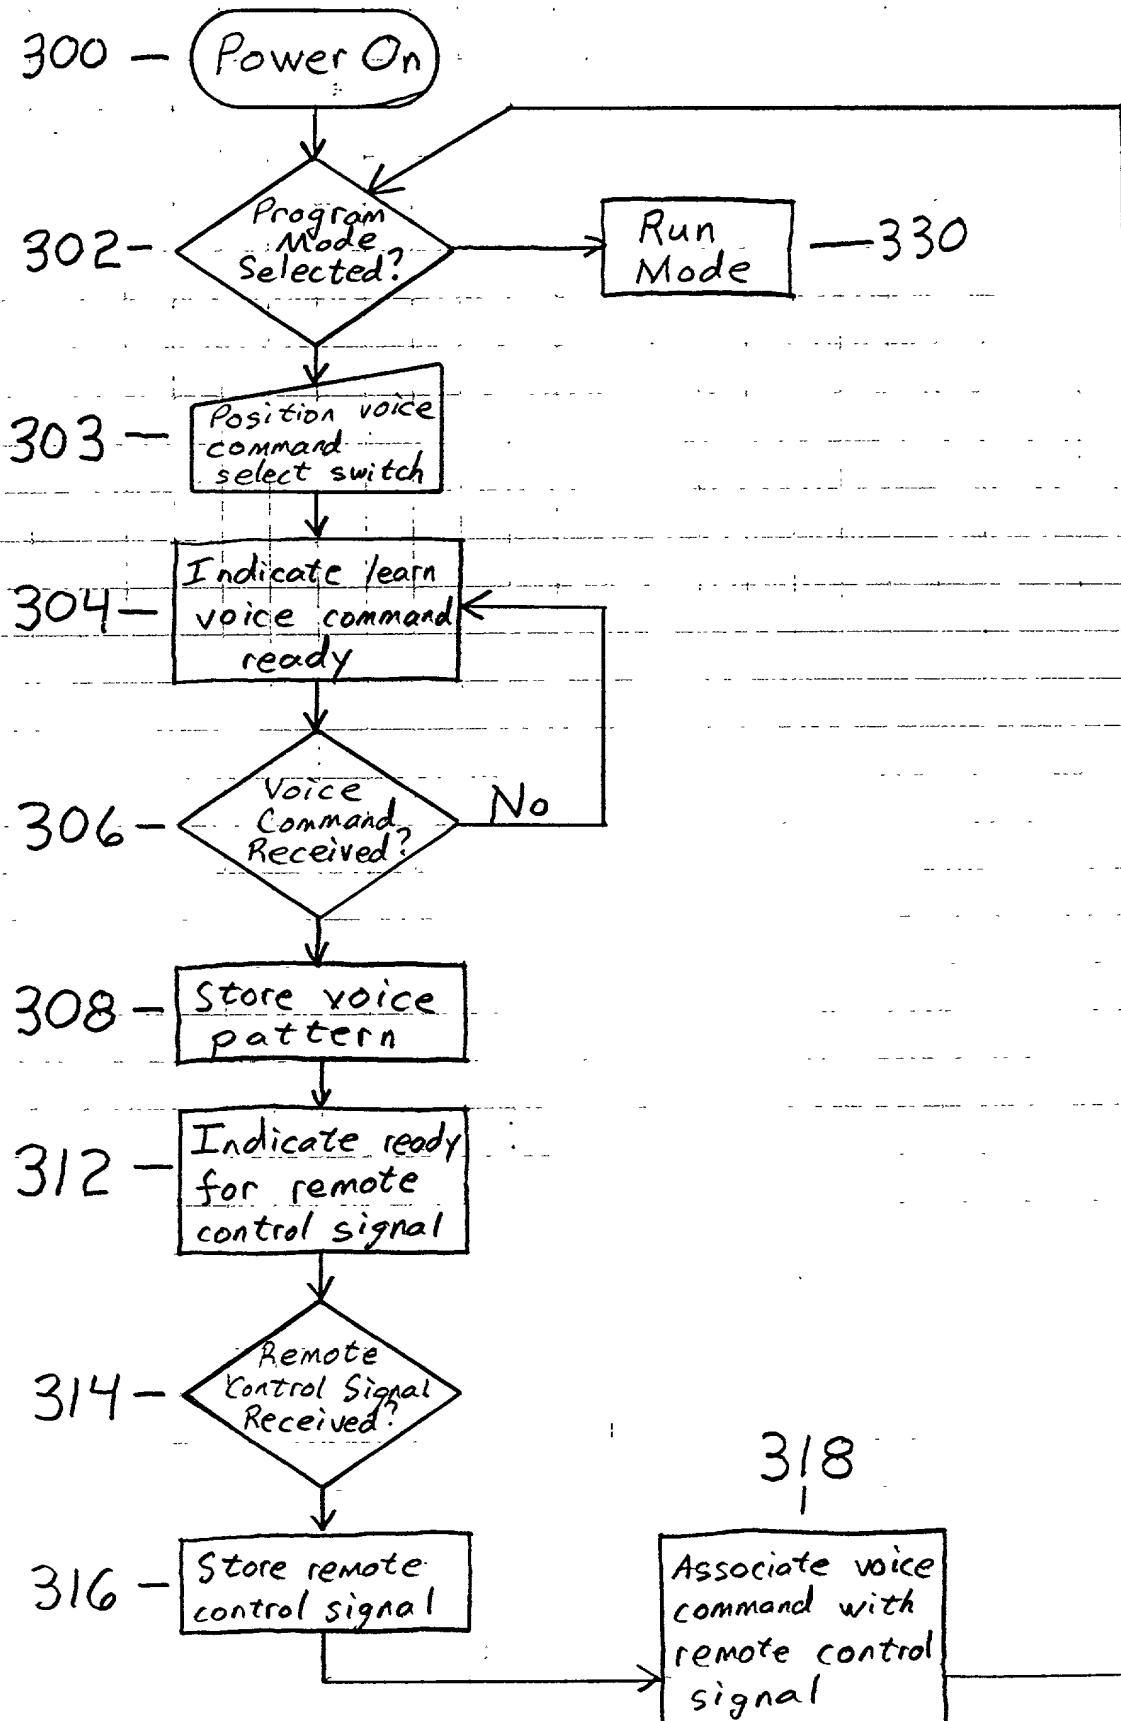


Figure 7

Run Mode 330

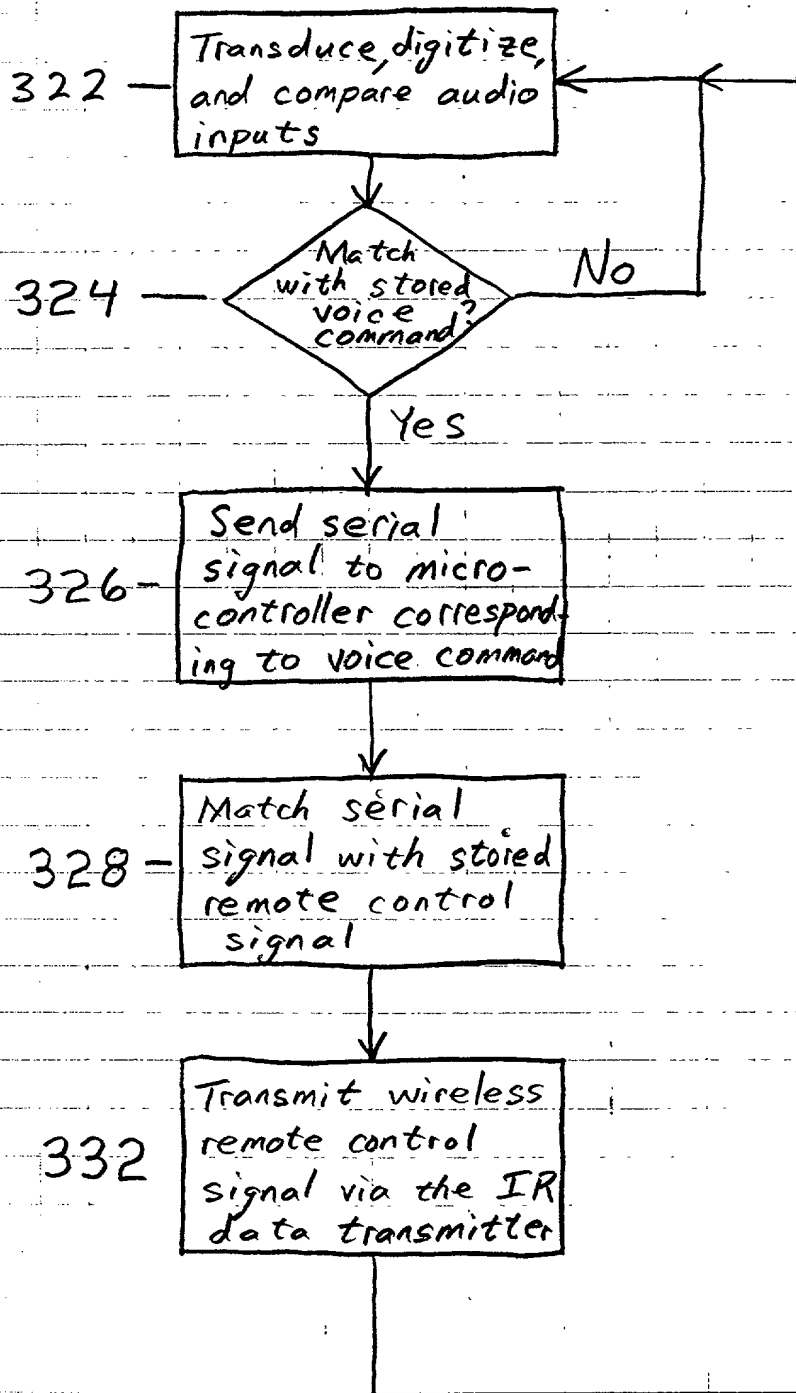


Figure 8

DECLARATION - USA PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled REMOTE CONTROL INTERFACE FOR REPLACEMENT VEHICLE STEREOS; the specification of which is attached hereto;

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56;

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S.A. Application(s)

Application No.: **09/442,627** Filing Date: **November 17, 1999** Status: **Pending**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole inventor: **Brett D. Riggs**

Inventor's signature



Date 4-10-2000

Residence: **911 Carole Circle, Placentia, Ca 92870**

Citizenship: **United States of America**

Post Office Address: **911 Carole Circle, Placentia, CA 92870**

Send Correspondence To:
KNOBBE, MARTENS, OLSON & BEAR, LLP
Customer No. 20,995

R:\DOCS\MHT\MHT-3559.DOC:lw
033000

[illegible]

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Brett D. Riggs)
App. No. : Unknown)
Filed : Herewith)
For : REMOTE CONTROL INTERFACE)
FOR REPLACEMENT VEHICLE)
STEREOS)
Examiner : Unknown)

ESTABLISHMENT OF RIGHT OF ASSIGNEE TO TAKE ACTION
AND
REVOCATION AND POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

The undersigned is empowered to act on behalf of the assignee below (the "Assignee"). A true copy of the original Assignment of the above-captioned application from the inventor(s) to the Assignee is attached hereto. This Assignment represents the entire chain of title of this invention from the Inventor(s) to the Assignee.

I declare that all statements made herein are true, and that all statements made upon information and belief are believed to be true, and further, that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001, and that willful, false statements may jeopardize the validity of the application, or any patent issuing thereon.

The undersigned hereby revokes any previous powers of attorney in the subject application, and hereby appoints the registrants of Knobbe, Martens, Olson & Bear, LLP, 620 Newport Center Drive, Sixteenth Floor, Newport Beach, California 92660, Telephone (949) 760-0404, **Customer No. 20,995**, as its attorneys with full power of substitution and


App. No. : Unknown
Filed : Herewith

revocation to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected herewith. This appointment is to be to the exclusion of the inventor(s) and his attorney(s) in accordance with the provisions of 37 C.F.R. § 3.71.

Please use **Customer No. 20,995** for all communications.

P. B. Clarke & Assoc.

Dated: 10 APRIL, 00

By: 
Bob Clarke

Title: President

Address: 1502 S. Santa Fe Street
Santa Ana, CA 92705

R:\DOCS\MHT\MHT-3560.DOC
033000